PET1300-12-054xA

AC-DC Front-End Power Supply

PET1300-12-054xA is a 1300 Watt AC to DC power-factor-corrected (PFC) power supply that converts standard AC mains power into a main output of 12 VDC for powering intermediate bus architectures (IBA) in high performance and reliability servers, routers, and network switches.

The PET1300-12-054xA meets international safety standards and displays the CE-Mark for the European Low Voltage Directive (LVD).

RoHS Compliant

Key Features & Benefits

- High efficiency up to 94.0%
- Wide input voltage range: 90 – 264 VAC
- Active power factor correction
- Always-On 10 W standby output (3.3 V)
- Hot-plug capability
- Parallel operation with active current sharing
- Full digital control for circuit loop and power management
- High density design: 30.25 W/in^3
- Compact form factor: 54.5 x 40.0 x 321.5 mm
- PMBus® Communication Interface for control, programming
- and monitoring
- Fully protected (OTP, OCP, OVP, SCP)
- 4K Bytes of EEPROM for user information
- 2 Status LEDs: FAIL and OK with fault signaling
- Approved to the latest edition of following Safety Standards: UL/CSA 62368-1, IEC / EN 62368-1

Applications

- High Performance Servers
- Networking Switches
- Routers

Disclaimer: PMBus is a registered trademark of SMIF, Inc.

1. ORDERING INFORMATION

PET	1300	-	12	-	054	x	A
Product Family	**Power Level**	**Dash**	**V1 Output**	**Dash**	**Width**	**Airflow**	**Input**
PET Front-Ends	2000 W		12 V		54 mm	N: Normal R: Reverse	A: AC

2. OVERVIEW

The PET1300-12-054xA AC/DC power supply is a fully DSP controlled, highly efficient front-end power supply. It incorporates resonance-soft-switching technology and interleaved power trains to reduce component stresses, providing increased system reliability and very high efficiency. With a wide input operational voltage range and minimal linear derating of output power with input voltage and temperature, the PET1300-12-054xA maximizes power availability in demanding server, network, and other high availability applications. The supply is fan cooled and ideally suited for integration with a matching airflow paths.

The PFC stage is an analogue solution; MCU is used to communicate with DSP chip on secondary side.

The DC/DC stage uses soft switching resonant techniques in conjunction with synchronous rectification. An active OR-ing device on the output ensures no reverse load current and hence it is ideally suited for operation in redundant power systems.

The always-on standby output with voltage level (3.3 Volts), provides power to external power distribution and management controllers. It is protected with an active OR-ing device for maximum reliability.

Status information is provided with front-panel LEDs. In addition, the power supply can be controlled and the fan speed set via the I²C bus. The I²C bus allows full monitoring of the supply, including input and output voltage, current, power, and inside temperatures.

Cooling is managed by a fan controlled by the DSP controller. The fan speed is adjusted automatically depending on the actual power demand and supply temperature and can be overridden through the I²C bus.

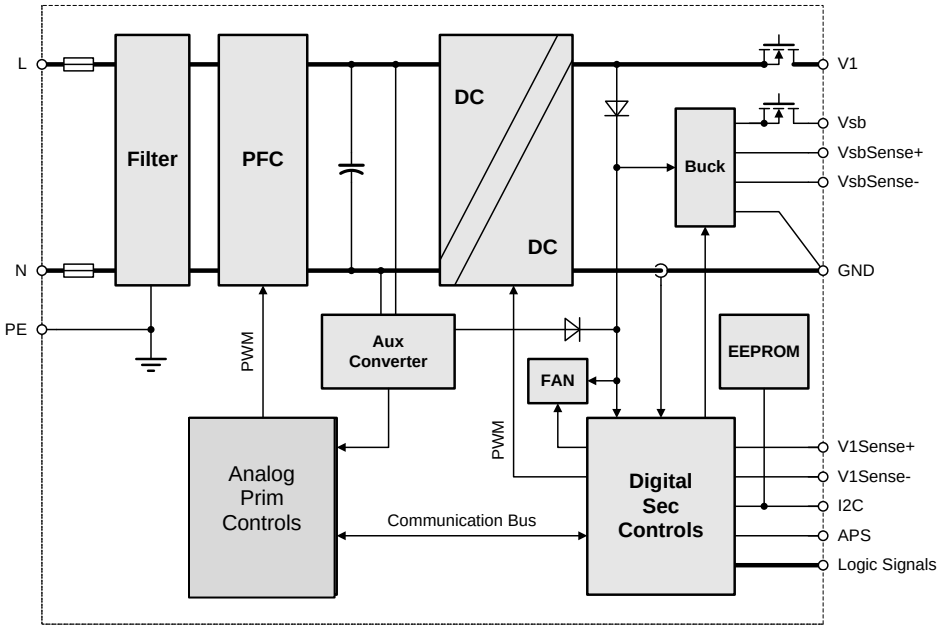

Figure 1. PET1300-12-054xA Block Diagram

3. INPUT

General Condition: T_A = 0… 60 °C, unless otherwise noted.

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
$V_{i\,nom}$	Nominal Input Voltage		100		240	VAC
V_i	Input Voltage Ranges	Normal operating ($V_{i\,min}$ to $V_{i\,max}$)	90		264	VAC
$I_{i\,max}$	Max Input Current	Vin = 110 VAC / 60 Hz, Full load			13.6	A_{rms}
$I_{i\,p}$	Inrush Current Limitation	Vi_{min} to Vi_{max}, TNTC = 25 °C			50	A_p
F_i	Input Frequency		47	50/60	63	Hz
PF	Power Factor	$V_{i\,nom}$, 50 Hz, > 0.2 $I_{i\,nom}$		0.95		W/VA
$V_{i\,on}$	Turn-on Input Voltage[1]	Ramping up	85		90	VAC
$V_{i\,off}$	Turn-off Input Voltage[1]	Ramping down	70		83	VAC
Power	Rated Power[2]	See *Figure 2* & *Figure 3*			1100	W
					1300	W
η	Efficiency without Fan	V_{in} = 230 V, 12 V / 21.6 A, 3.3 V / 0.6 A T_A = 25 °C		93.0		%
		V_{in} = 230 V, 12 V / 54 A, 3.3 V / 1.5 A T_A = 25 °C		94.0		
		V_{in} = 230 V, 12 V / 108 A, 3.3 V / 3 A T_A = 25 °C		92.0		
T_{hold}	Hold-up Time	After last AC zero point, V_1 > 11.6 V, V_{SB} within regulation, V_i = 230 VAC, 12 V / 108 A, 3.3 V / 3 A	10			ms

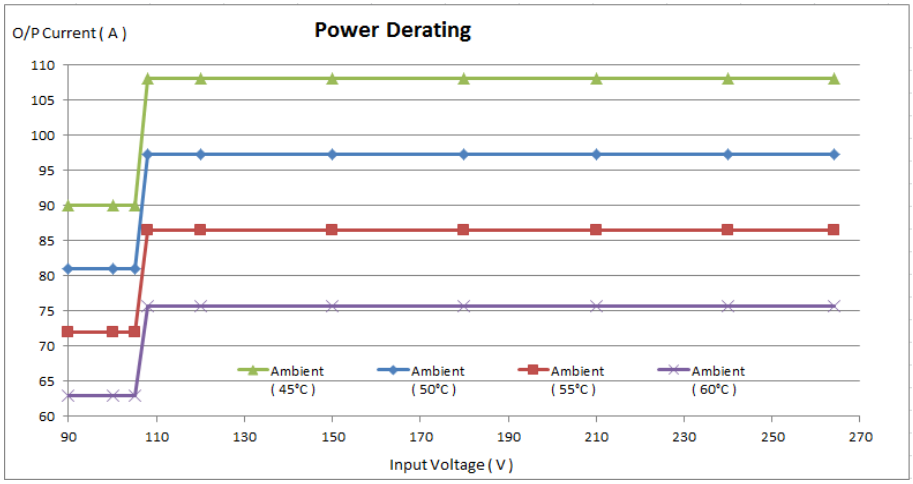

Figure 2. Derating on I_{out} vs V_{in} and Ta for PET1300-12-054NA

[1] The Front-End is provided with a minimum hysteresis of 3 V during turn-on and turn-off within the ranges.
[2] The output power is should be derating as below curve if operation temperature increases from 45°C to 60°C.

© 2023 Bel Power Solutions

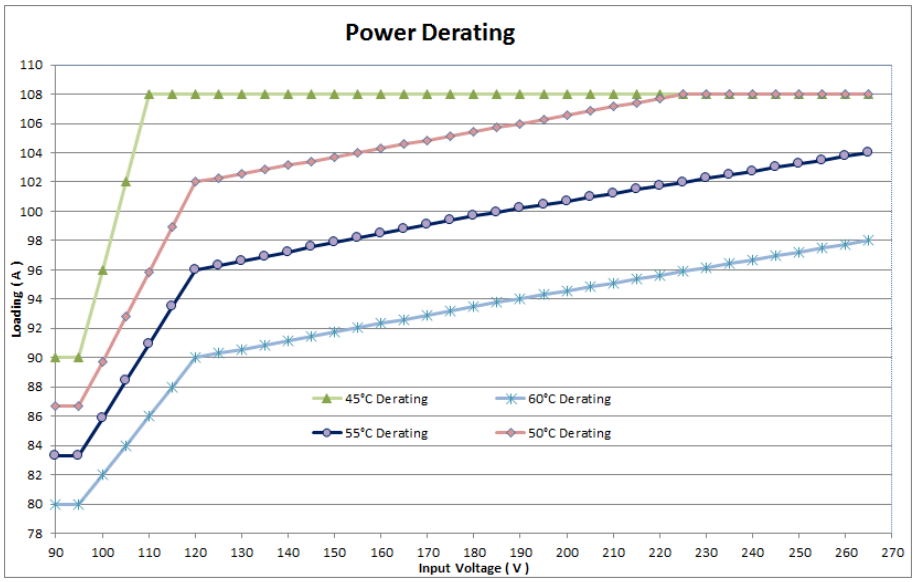

Figure 3. Derating on I_{out} vs V_{in} and Ta for PET1300-12-054RA

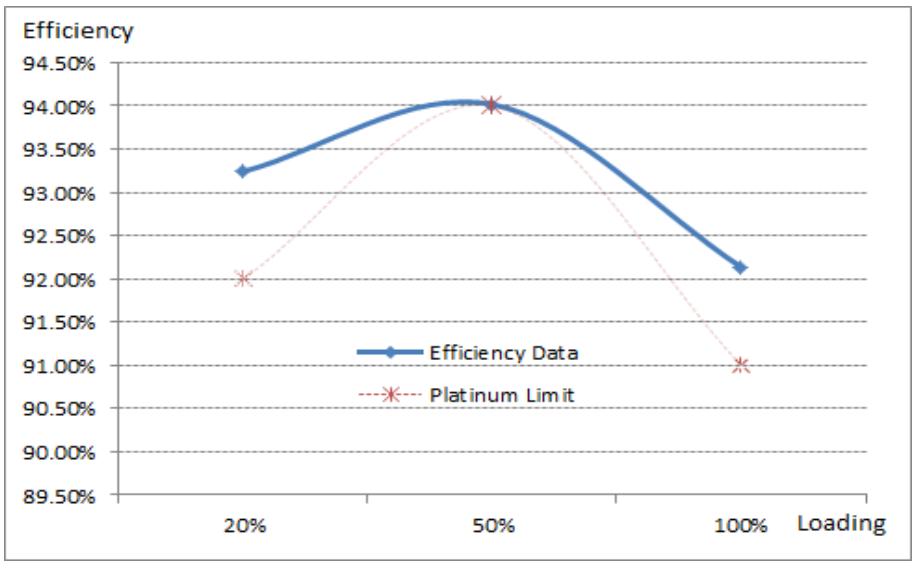

Figure 4. Efficiency Measurement Curve

4. OUTPUT

General Condition: T_A = 0… 60 °C, unless otherwise noted.

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Main Output V_1						
$V_{1\ nom}$	Nominal Output Voltage	0.5 ·$I_{1\ nom}$, T_{amb} = 25 °C		12.0		VDC
$V_{1\ set}$	Output Setpoint Accuracy		-0.5		+0.5	% $V_{1\ nom}$
$dV_{1\ tot}$	Total Regulation	$V_{i\ min}$ to $V_{i\ max}$, 0 to 100% $I_{1\ nom}$, $T_{a\ min}$ to $T_{a\ max}$	-3		+3	% $V_{1\ nom}$
$P_{1\ nom}$	Nominal Output Power	V_1 = 12 VDC		1296		W
$I_{1\ nom}$	Nominal Output Current	V_1 = 12 VDC, Vin ≥ 108 VAC		108		A_{DC}
$v_{1\ pp}$	Output Ripple Voltage	$V_{1\ nom}$, $I_{1\ nom}$, 20 MHz BW			180	mVpp
$dV_{1\ Load}$	Load Regulation	V_i = $V_{i\ nom}$, 0 - 100% $I_{1\ nom}$		60		mV
$dV_{1\ Line}$	Line Regulation	V_i =$V_{i\ min}$...$V_{i\ max}$		20		mV
dI_{share}	Current Sharing *(abs (I_1-I_2), between any two units in parallel)*	when Bus load ≥ 27 A			4.5	A
		when Bus load < 27 A			5.6	A
dV_{dyn}	Dynamic Load Regulation	Iout:10%--60% of full load; 50%--100% of full load dI_1/dt = 1A/µs, recovery within 1% of $V_{1\ nom}$	-0.6		0.6	V
T_{rec}	Recovery Time			0.5	1	ms
$t_{AC\ V1}$	Start-up Time from AC				2	s
$t_{V1\ rise}$	Rise Time	V_1 = 10…90% $V_{1\ nom}$		3		ms
C_{Load}	Capacitive Loading	T_a = 25 °C			11000	µF
Standby Output V_{SB}						
$V_{SB\ nom}$	Nominal Output Voltage	0.5 ·$I_{SB\ nom}$, T_{amb} = 25 °C		3.3		VDC
$V_{SB\ set}$	Output Setpoint Accuracy		-1		+1	%V_{1nom}
$dV_{SB\ tot}$	Total Regulation	$V_{i\ min}$ to $V_{i\ max}$, 0 to 100% $I_{SB\ nom}$, $T_{a\ min}$ to $T_{a\ max}$	-1.5		+1.5	%V_{SBnom}
$P_{SB\ nom}$	Nominal Output Power	V_{SB} = 3.3 VDC, normal airflow		10		W
$I_{SB\ nom}$	Nominal Output Current	V_{SB} = 3.3 VDC, normal airflow		3		A_{DC}
$V_{SB\ pp}$	Output Ripple Voltage	$V_{SB\ nom}$, $I_{SB\ nom}$, 20 MHz BW (See Section 5.1)			45	mVpp
dV_{SB}	Droop	0 - 100% $I_{SB\ nom}$		67		mV
dV_{SBdyn}	Dynamic Load Regulation	ΔI_{SB} = 50% $I_{SB\ nom}$, I_{SB} = 5 … 100% $I_{SB\ nom}$, dI_o/dt = 0.5 A/µs, recovery within 1% of $V_{1\ nom}$	-3		3	%V_{SBnom}
T_{rec}	Recovery Time				250	µs
$t_{AC\ VSB}$	Start-up Time from AC				3	s
$t_{VSB\ rise}$	Rise Time	V_{SB} = 10…90% $V_{SB\ nom}$		4	20	ms
C_{Load}	Capacitive Loading	T_{amb} = 25 °C			1000	µF

© 2023 Bel Power Solutions

5. PROTECTION

General Condition: T_A = 0… 60 °C, unless otherwise noted.

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
F	Input Fuses (L+N)	Not user accessible, quick-acting (F)		16		A
$V_{1\ OV}$	OV Threshold V_1		13.5		14.5	VDC
$t_{OV\ V1}$	OV Latch Off Time V_1				1	ms
$V_{SB\ OV}$	OV Threshold V_{SB}		3.6		4.3	VDC
$t_{OV\ VSB}$	OV Latch Off Time V_{SB}				1	ms
$I_{V1\ lim}$	Current Limit V_1	See *Figure 5* & *Figure 6*	112	115	117	A_{DC}
$I_{sb\ lim}$	Current Limit V_1 T_{amb} = 25 °C	Standby output can recover.			4.5	A
$I_{V1\ SC}$	Max Short Circuit Current V_1			150		A
$t_{V1\ SC}$	Short Circuit Regulation Time	V_1 < 3 V, time until I_{V1} is limited to < $I_{V1\ sc}$		2		ms
$t_{V1\ SC\ off}$	Short Circuit Latch Off Time	Time to latch off when in short circuit		500		ms
T_{SD}	Over Temperature on Heat Sinks	Automatic shut-down		115		°C

NOTE: The OCP should be derating as below curve if operation temperature increases from 45°C to 60°C, And OCP warning is before 2 A than OCP set point.

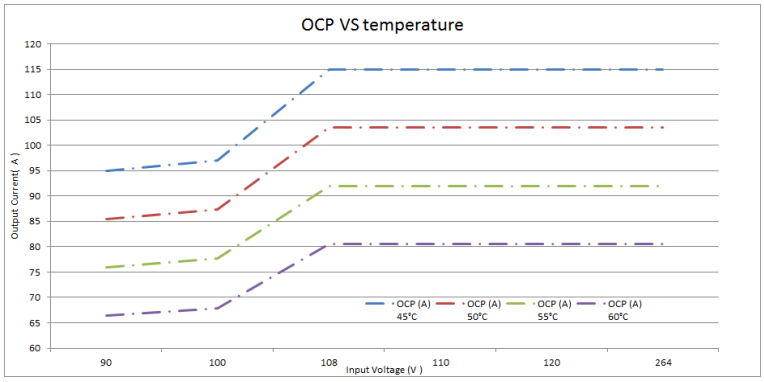

Figure 5. Vin vs Output Current for PET1300-12-054NA

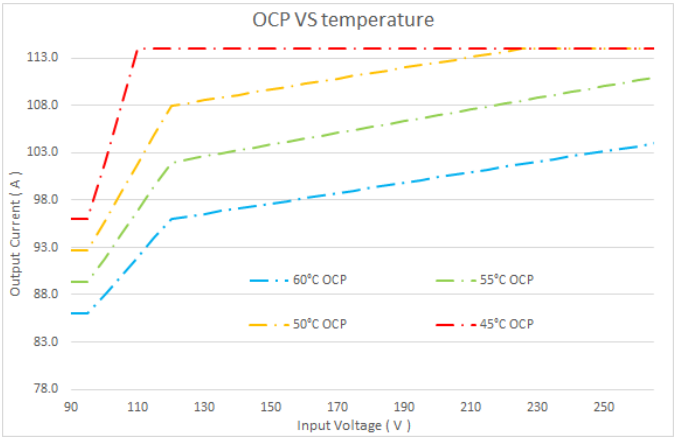

Figure 6. Vin vs Output Current for PET1300-12-054RA

6. SIGNALING AND CONTROL

6.1 FRONT LEDs

The front-end has 2 front LEDs showing the status of the supply. LED number one is green which indicates presence of AC power, LED number two is bi-colored: green and yellow, which indicates DC power presence or fault. For the position and states of the LEDs see *Table 2*.

POWER SUPPLY CONDITION	GREEN (OK) LED STATUS	AMBER (FAIL) LED STATUS
No AC power to all power supplies	OFF	OFF
Power Supply Failure (includes over voltage, over current, over temperature and fan failure)	OFF	ON
Power Supply Warning events where the power supply continues to operate (high temperature, high power and slow fan)	OFF	1 Hz Blinking
AC Present / 3.3 V_{SB} on (PSU OFF)	1 Hz Blinking	OFF
Power Supply ON and OK	ON	OFF

Table 1. LED Status

NOTE: When unit see fan failure, unit will shut down and can only be restarted by using PSON_L signal or AC input power recycling or PMBus® commands. Refer to software specification for detail.

6.2 ELECTRICAL CHARACTERISTICS

General Condition: T_A = 0… 60 °C, unless otherwise noted.

PARAMETER	DESCRIPTION / CONDITION		MIN	NOM	MAX	UNIT
PSKILL_H/PSON_L/PRESENT_L						
V_{IL}	Input Low Level Voltage		0		0.8	V
V_{IH}	Input High Level Voltage		2.0		3.6	V
$I_{IL, H}$	Maximum Input Sink or Source Current		0		1	mA
$R_{puSKILL_H}$	Internal Pull Up Resistor on PSKILL_H			10		kΩ
R_{puPSON_L}	Internal Pull Up Resistor on PSON_L			10		kΩ
$R_{puPRESENT_L}$	Internal Pull Up Resistor on PRESENT_L			None		kΩ
R_{LOW}	Resistance Pin to SGND for Low Level		0		1	kΩ
R_{HIGH}	Resistance Pin to SGND for High Level		50			kΩ
PWOK_H Output						
V_{ext}	Maximum External Pull Up Voltage				3.6	V
V_{OL}	Output Low Level Voltage	I_{sink} < 2 mA	0		0.4	V
V_{OH}	Output High Level Voltage	Isource < 0.5 mA	2.4		3.6	V
R_{puPWOK_H}	Internal Pull Up Resistor on PWOK_H			None		kΩ
ACOK_H Output						
V_{ext}	Maximum External Pull Up Voltage				3.6	V
V_{OL}	Output Low Level Voltage	I_{sink} < 2 mA	0		0.4	V
V_{OH}	Output High Level Voltage	Isource < 0.5 mA	2.4		3.6	V
R_{puACOK_H}	Internal Pull Up Resistor on ACOK_H			None		kΩ
SMB_ALERT_L Output						
V_{ext}	Maximum External Pull Up Voltage				12	V
V_{OL}	Output Low Level Voltage	Isink < 2 mA	0		0.4	V
I_{OH}	Maximum High Level Leakage Current				10	µA
$R_{puSMB_ALERT_L}$	Internal Pull Up Resistor on SMB_ALERT_L			None		kΩ

© 2023 Bel Power Solutions

6.3 GRAPHICAL USER INTERFACE

Bel Power Solutions provide with its “Bel Power Solutions I²C Utility” a Windows® XP/Vista/Win7 compatible graphical user interface allowing the programming and monitoring of the PET1300-12-054xA Front-End.
The utility can be downloaded on belfuse.com/power-solutions and supports both the PSMI and PMBus® protocols.
The GUI allows automatic discovery of the units connected to the communication bus and will show them in the navigation tree.
In the monitoring view the power supply can be controlled and monitored.

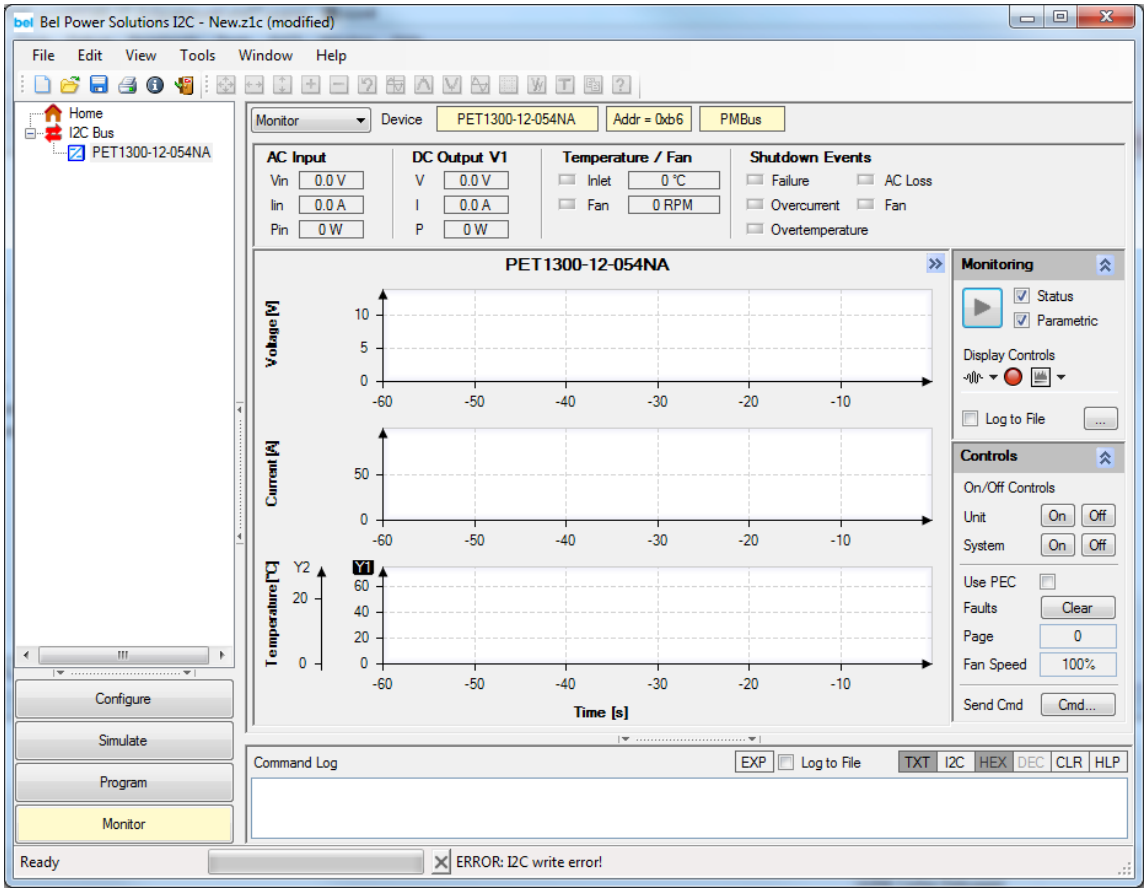

Figure 7. I2C Bus to DSP and EEPROM

COMMAND	10% ~ 20% FULL LOAD	20% ~ 100% FULL LOAD	REMARK
Read_Iin	< 0.5 A	+/- 3%	It is for corresponding to max input current
Read_Iout	+/- 2%	+/- 2%	It is for corresponding to max output current
Read_Vin	+/- 3%	+/- 2.5 V	
Read_Vout	+/- 2%	+/- 2%	
Read_Pin	---	+/- 15%	It is for corresponding to max input power
Read_Pout	+/- 3%	+/- 3%	It is for corresponding to max output power

Table 2. Accuracy for PMBus®

6.4 PRESENT_L

The PRESENT_L is an output signal and it is used to sense the number of power supplies in the system (operational or not). This signal is connected to the power supply's output ground. Electrical characteristics see 6.2.

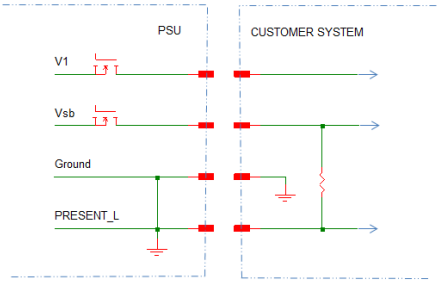

Figure 8. Interconnect Diagram of PRESENT_L Signal

6.5 SMB_ALERT_L

The SMB_ALERT_L is an output signal and shall be an open collector with the pull-up resistor located at the receiving end and shall capable of sinking up to 4 mA.
This signal indicates that the power supply is experiencing a problem that the user should investigate. This may be asserted due to Critical events or Warning events. See PMBus® specification for further details.

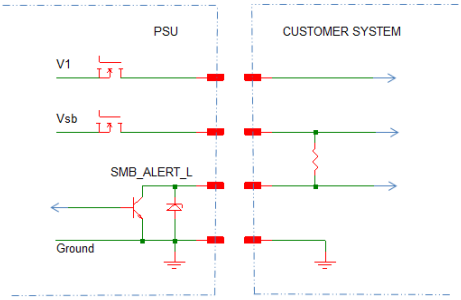

Figure 9. Interconnect Diagram of SMB_ALERT_L Signal

6.6 PSKILL_H

This is an input signal and is used to force the 12 V main output off if the supply is removed from the system. At the system level this pin will be connected to the output return directly. When this input is low the power supply will operate. If the input is floating the 12 V main output will turn off while the 3.3 VSB will remain on. This signal overrides all other on-and-off signals. On the power supply connector, this pin is shorter than the others so it is a last-make and first-break contact. See below *Table 3* for Logic Table.

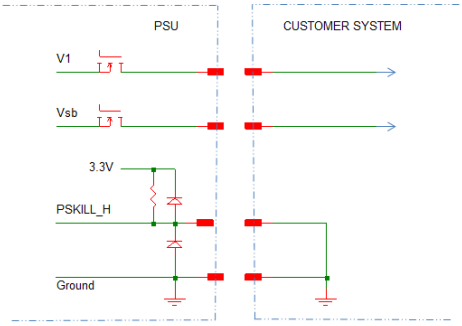

Figure 10. Interconnect Diagram of PSKILL_H Signal

© 2023 Bel Power Solutions

SIGNAL CHARACTERISTICS		
Signal Type: Input Signal to the power supply	Accepts a ground input from the system. Pull-up to 3.3 VSB located in the power supply.	
PS_KILL = Low, PS_ON = Low	ON	
PS_KILL = Open, PS_ON = Low or Open	OFF	
PS_KILL = Low, PS_ON = Open	OFF	
	MIN	**MAX**
Source current, Vps_kill =Low		4 mA

Table 3. PS_ON_L Signal Characteristics

6.7 PSON_L

The PS_ON_L signal is an input signal used to remotely turn on/off the power supply. PS_ON_L is an active LOW signal that turns on the 12 V main output. In the low state this input will not source more than 4 mA of current. The 12 V output will be disabled when this input is driven HIGH, or open circuited. See *Table 4* for Logic Table.

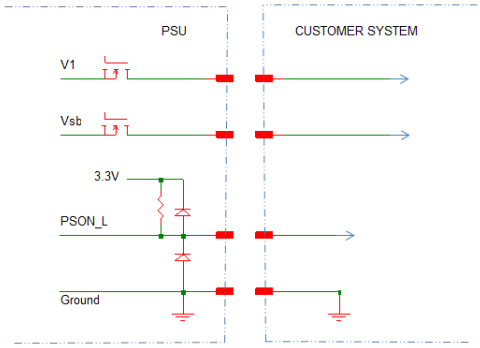

Figure 11. Interconnect Diagram of PSON_L Signal

SIGNAL CHARACTERISTICS		
Signal Type: Input signal to the power supply	Accepts an open collector/drain input from the system. Pull-up to 3.3 VSB located in power supply.	
PS_ON_L = Low, PS_KILL = Low	ON	
PS_ON_L = Open, PS_KILL = Low or Open	OFF	
PS_ON_L = Low, PS_KILL = Open	OFF	
	MIN	**MAX**
Output Source Current, VPS_ON_L= Low		4 mA

Table 4. PS_ON_L Signal Characteristics

6.8 PW_OK

PW_OK is an output signal and will be pulled HIGH by the power supply to indicate that all the outputs are within the regulation limits of the power supply. When 12 V main output is < 10.9 V or > 13.2 V, or if any of the outputs fail due to over current protection, over voltage protection, over temperature, or fan failure then this output will be driven LOW. In the event when AC mains power is lost, this signal will be driven LOW at least 20 ms before the +3.3 VSB output is lost. The output will be an open collector/drain. The start of the PW_OK delay time shall be inhibited as long as any power supply's 12 V output is in current limit. See *Table 5*.

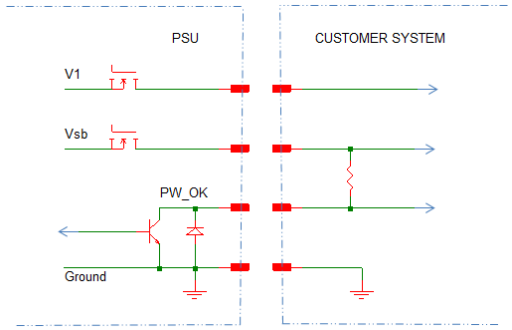

Figure 12. Interconnect Diagram of PW_OK Signal

SIGNAL CHARACTERISTICS		
Signal Type: Output signal from the power supply	Open collector/drain (system side to provide pull-up, another pull-up to 3.3 VSB could also be located in the power supply)	
PW_OK = High	Power OK	
PW_OK = Low	Power Not OK	
	MIN	**MAX**
Input Sink current, PW_OK = Low		4 mA
Output Source current, PW_OK = High		2 mA

Table 5. PW_OK Signal Characteristics

6.9 AC_OK

This signal is an output signal and will be asserted, driven HIGH, by the power supply to indicate that the input voltage meets the minimum requirements of Section 3.1.3. After falling outside the input voltage requirements for more than 20 ms, the signal must be driven LOW. The output will be an open collector/drain. See below *Table 6*.

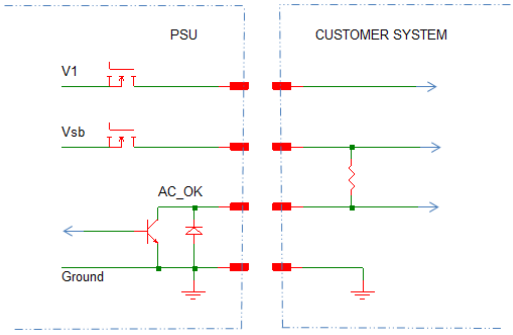

Figure 13. Interconnect Diagram of AC_OK Signal

SIGNAL CHARACTERISTICS		
Signal Type: Output signal from the power supply	Open collector/drain (system side to provide pull-up, another pull-up to 3.3 VSB could also be located in the power supply)	
AC_OK = High	AC OK	
AC_OK = Low	AC Low (Not OK)	
	MIN	**MAX**
Input Sink current, AC_OK = Low		4 mA
Output Source current, AC_OK = High		2 mA

Table 6. AC_OK Signal Characteristics

© 2023 Bel Power Solutions

6.10 CURRENT SHARING

All outputs shall be capable of operating in a redundant current share mode. A maximum of 6 power supplies may be operated in parallel. All outputs shall incorporate an isolation device (Or-ing MOSFET or diode) for fault isolation. Filter capacitors that are located after the isolation device shall be of high reliability and shall be de-rated sufficiently to minimize failures.
The 3.3 V output current sharing shall be of a droop type. The +12 V current sharing shall be a single wire type, active current sharing. Connecting the Ishare (current share) pins of each power supply together shall enable the current share feature. Shorting or opening of a current share pin shall not cause the output voltage to go out of steady state regulation.
For 12 V output the Ishare (load sharing) voltage shall be a linear function Ishare [V] = 8 x Iout/108 (with 8 V at 108 A) for a single power supply (~74 mV/A).
At light load, the load share becomes difficult because of low feedback signal. Refer to Table 2 for current sharing accuracy.
The current balance accuracy is calculated as: $2*|I1-I2|/(I1+I2)$, where the I1 is the PSU1 load current and I2 is the PSU2 load current.

6.11 REMOTE SENSE

The outputs specified shall incorporate remote sense and will compensate for specified load cable drop. In the event of loss of remote sense, all outputs shall revert to internal sense so as to limit the outputs to less than 105% of nominal.

7. TIMING DIAGRAM AND TABLE

Unless defined otherwise, all control signals shall be TTL compatible with respect to the output return and shall be isolated from the primary circuit and be SELV rated. All input signals shall be driven from an open collector with the pull-up resistor located in the power supply and shall be capable of sourcing up to 4 mA. General LVTTL signal levels are specified in below table except where explicitly specified otherwise.

PARAMETER	SYMBOL	MIN	MAX	UNITS
Output High Voltage	Voh	2.4	3.6	V
Output Low Voltage	Vol	0	0.4	V
Input High Voltage	Vih	2.0	3.6	V
Input Low Voltage	Vil	0	0.8	V

Table 7. Low-Voltage TTL (LVTTL) Voltage Levels

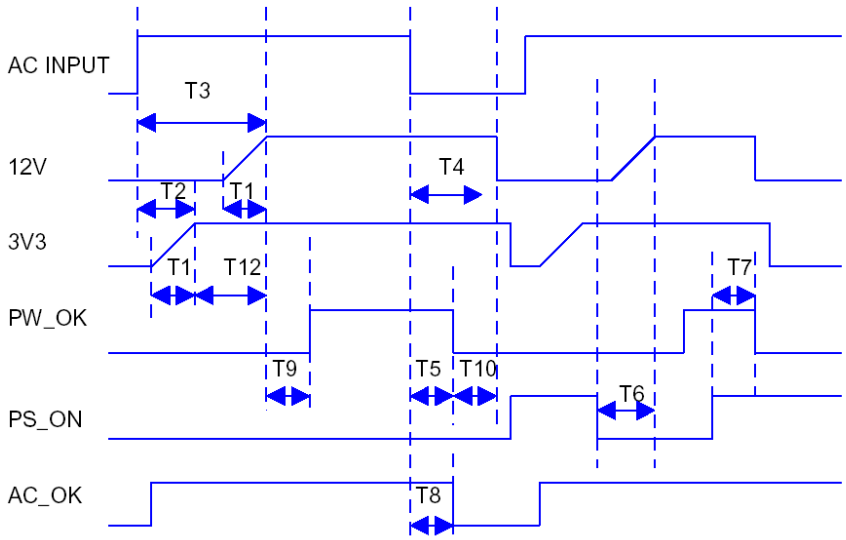

Figure 14. Timing Diagram

PARAMETER	CONDITION / COMMENTS	MIN	TYP	MAX	UNITS
T1 (Tout_rise)	Output voltage rise time from each main output	0.5		100	ms
T2 (Tsb_on_delay)	Delay from AC being applied to 3V3 being within regulation			2500	Ms
T3 (Tac_on_delay)	Delay from AC being applied to all output voltages being within regulation			3000	ms
T4 (Tvout_holdup)	Time all output voltages, including 3V3, stay within regulation after loss of AC	10			ms
T5 (Tpw_ok_holdup)	Delay from loss of AC to de-assertion of PW_OK	5			ms
T6 (Tps_on_delay)	Delay from PS_ON_L active to output voltages within regulation limits	5		400	ms
T7 (Tps_on_pw_ok)	Delay from PS_ON_L de-active to PW_OK being de-asserted			50	ms
T8 (Tac_ok_off)	Delay from loss of AC input to de-assertion of AC_OK			20	ms
T9 (Tpw_ok_on)	Delay from output voltages within regulation limits to PW_OK asserted at turn on	100		1000	ms
T10 (Tpw_ok_off_12V)	Delay from PW_OK de-asserted to 12 VDC dropping out of regulation limits	1		700	ms
T11 (Tpw_ok_off_3V3)	Delay from PW_OK de-asserted to 3V3 dropping out of regulation limits	20			ms
T12 (Tsb_vout)	Delay from 3V3 being in regulation to 12 VDC being in regulation at AC turn on.	50		1000	ms
T13 (Tac_ok_on)	Delay from AC being applied to assertion of AC_OK			1500	ms

© 2023 Bel Power Solutions

8. ELECTROMAGNETIC COMPATIBILITY

8.1 IMMUNITY

PARAMETER	DESCRIPTION / CONDITION	CRITERION
ESD Contact Discharge	IEC / EN 61000-4-2, ±8 kV, 25+25 discharges per test point (metallic case, LEDs, connector body)	A
ESD Air Discharge	IEC / EN 61000-4-2, ±15 kV, 25+25 discharges per test point (non-metallic user accessible surfaces)	A
Radiated Electromagnetic Field	IEC / EN 61000-4-3, 10 V/m, 1 kHz/80% Amplitude Modulation, 1 µs Pulse Modulation, 10 kHz…2 GHz	A
Burst	IEC / EN 61000-4-4, level 3 AC port ±2 kV, 1 minute DC port ±1 kV, 1 minute	A
Surge	IEC / EN 61000-4-5 4 kV CM 2 kV DM	A
RF Conducted Immunity	IEC/EN 61000-4-6, Level 3, 10 Vrms, CW, 0.1 … 80 MHz	A
Voltage Dips and Interruptions	IEC/EN 61000-4-11 1: Vi 230 V, 100% Load, Phase 0 °, Dip 100%, Duration 10 mS 2: Vi 230 V, 100% Load, Phase 0 °, Dip 100%, Duration 20 mS 3: Vi 230 V, 100% Load, Phase 0 °, Dip 100%, Duration > 20 mS	A V_{SB}: A, V_1: B V_{SB}, V_1: B

NOTE: Most of the immunity requirements are derived from EN 55024: 1998/A2:2003.

8.2 EMISSION

PARAMETER	DESCRIPTION / CONDITION	CRITERION
Conducted Emission	EN55022 / CISPR 22: 0.15 … 30 MHz, QP and AVG, single unit	Class A
	EN55022 / CISPR 22: 0.15 … 30 MHz, QP and AVG, 2 units in rack system	Class A
Radiated Emission	EN55022 / CISPR 22: 30 MHz … 1 GHz, QP, single unit	Class A
	EN55022 / CISPR 22: 30 MHz … 1 GHz, QP, 2 units in rack system	Class A
Harmonic Emissions	IEC61000-3-2, Vin = 115 VAC / 60 Hz, & Vin = 230 VAC/ 50 Hz, 100% Load	Class A
Acoustical Noise	46 dBA at 1 meter, 25 °C, 50% Load	-
AC Flicker	IEC61000-3-3, Vin = 230 VAC / 60 Hz, 100% Load	Pass

9. SAFETY / AGENCY APPROVALS

Maximum electric strength testing is performed according to UL / CSA 62368-1, IEC/EN 62368-1. Input-to-output electric strength tests should not be repeated in the field. Bel Power Solutions will not honor any warranty claims resulting from electric strength field tests.

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Agency Approvals	Approved to the latest edition of the following standards: UL / CSA 62368-1 IEC / EN 62368-1		Approved by independent body (see CE Declaration)		
Isolation Strength	Input (L/N) to case (PE)		Basic		
	Input (L/N) to output		Reinforced		
	Output to case (PE)		Functional		
Electrical Strength Test	Input to case	2500			VDC
	Input to output	4000			

10. ENVIRONMENTAL

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
T_A	Ambient Temperature	$V_{i\ min}$ to $V_{i\ max}$, $I_{1\ norm}$, $I_{SB\ nom}$	0		+60	°C
T_S	Storage Temperature	Non-operational	-40		+85	°C
	Altitude	Operational, above Sea Level	-		10,000	Feet
N_a	Audible Noise	V_i = 230 VAC, 50% $I_{o\ nom}$, T_A = 25°C		46		dBA

NOTE: Refer to Figure 2 & 3 for Derating.

11. MECHANICAL

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
		Width	54.1	54.5	54.9	
	Dimensions	Height	39.6	40.0	40.4	mm
		Depth	321.1	321.6	322.1	
M	Weight			1.09		kg

A 3D step file of the power supply casing is available on request.

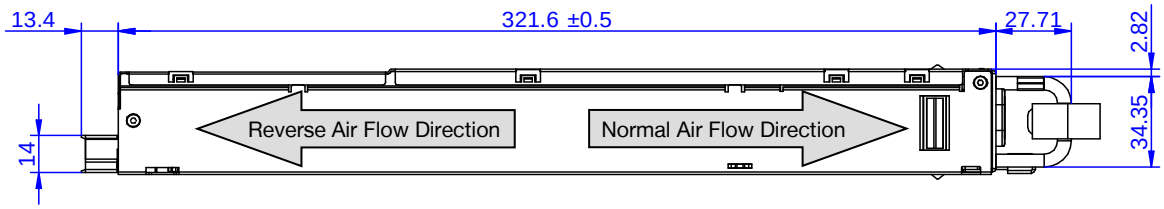

Figure 15. Side View 1

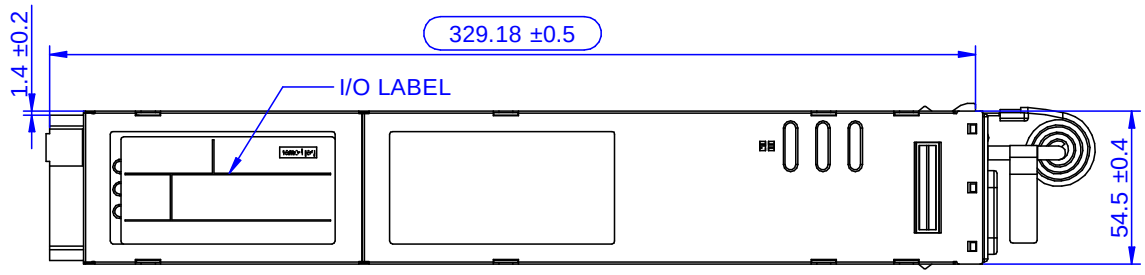

Figure 16. Top View

© 2023 Bel Power Solutions

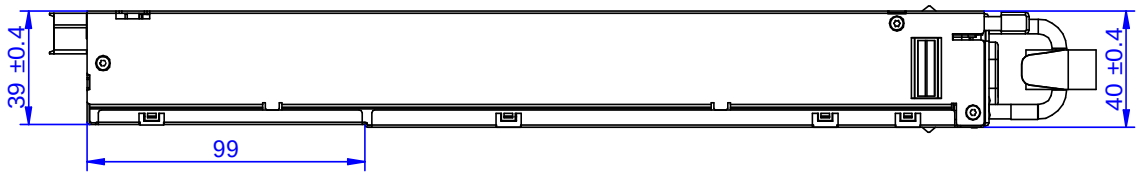

Figure 17. Side View 2

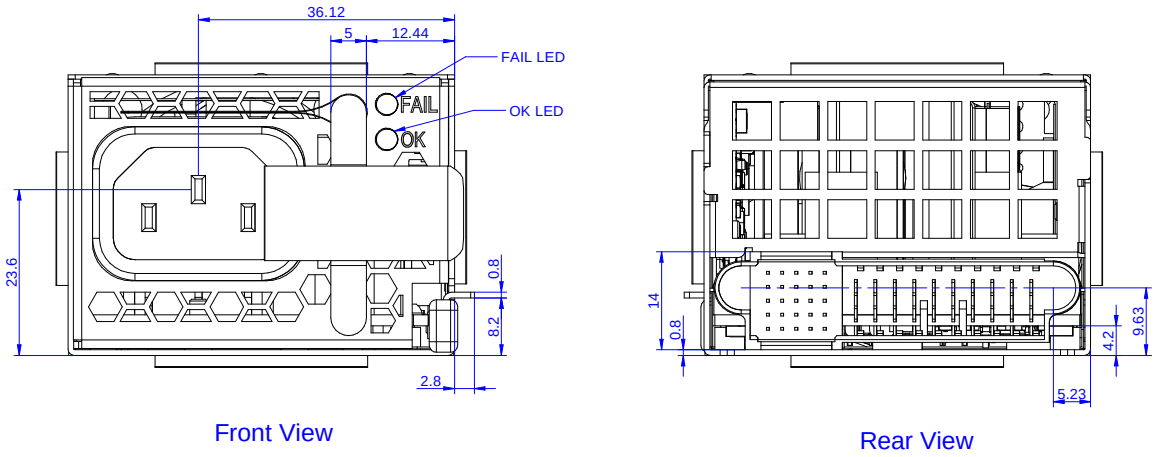

Figure 18. Front and Rear View

12. CONNECTIONS

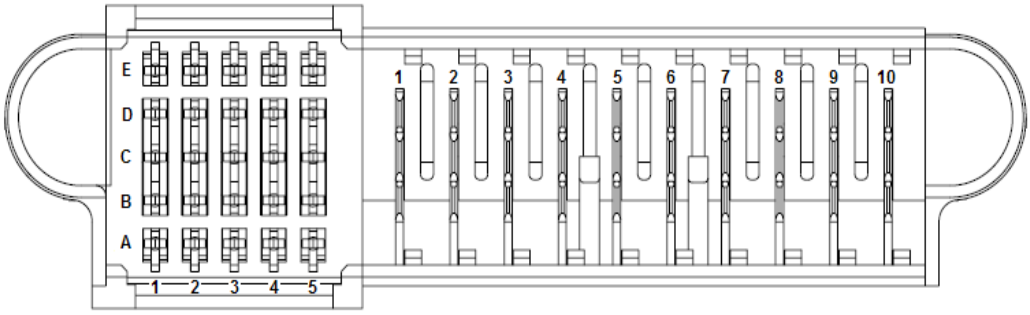

Unit: Tyco Electronics P/N 1926736-2 or FCI 10135322-002LF or equivalent

Counter part: Tyco Electronics P/N 2-1926739-5 or FCI 10108888-R10253SLF (Bel Power Solutions P/N: ZES.00672)

PIN	NAME	DESCRIPTION
Output		
6, 7, 8, 9, 10	V1	+12 VDC main output
1, 2, 3, 4, 5	PGND	Power ground (return)
Control Pins		
A1, B1, C1, D1, E1	VSB	Standby positive output (+3.3 V)
A2, B2	SGND	Signal ground (return)
C2	NC	Reserved
D2	NC	Reserved
E2	NC	Reserved
A3	PS_KILL	Power supply kill (lagging pin)
B3	NC	Reserved
C3	SDA	I²C data signal line
D3	V1_SENSE_R	Main output negative sense
E3	V1_SENSE	Main output positive sense
A4	SCL	I²C clock signal line
B4	PS_ON_L	Power supply on input (connect to A2/B2 to turn unit on)
C4	ALERT_L	SMB Alert signal output
D4	ISHARE	12 V current share signal (LS)
E4	AC_OK	AC input OK signal
A5	A0	Address 0
B5	NC	Reserved
C5	PW_OK	Power OK signal output (lagging pin)
D5	A1	Address 1
E5	PRESENT_L	Power supply present (lagging pin)

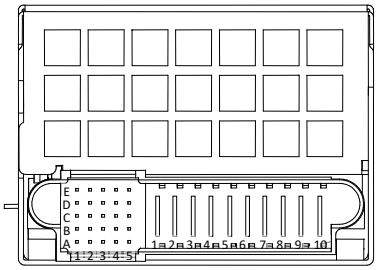

© 2023 Bel Power Solutions

13. ACCESSORIES

ITEM	DESCRIPTION	ORDERING PART NUMBER	SOURCE
	Bel Power Solutions I²C Utility Windows XP/Vista/7 compatible GUI to program, control and monitor PET Front-Ends (and other I²C units)	N/A	belfuse.com/power-solutions
Evaluation board	**Dual Connector Board** Connector board to operate 2 PET units in parallel. Includes an on-board USB to I²C converter (use *Bel Power Solutions I²C Utility* as desktop software).	VRA.00333.0	Bel Power Solutions

14. PMBus® COMMUNICATION

14.1 ADDRESS SELECT

A2	A1	A0	UNIT ADDRESS	EEPROM ADDRESS
0	0	0	0xB0	0xA0
0	0	1	0xB2	0xA2
0	1	0	0xB4	0xA4
0	1	1	0xB6	0xA6

NOTE: A2 = 1 is not implemented.

Table 8. Address Select

14.2 PMBus® COMMANDS

NOTE:
Reference: PMBus® Power System Management Protocol Specification Part II – Command Language Revision 1.1.
Commands not included in the table below are Not Implemented.
Feature that are To Be Defined (TBD), or Not Implemented are shaded.
R = Read-Only; RW = Read/Write; W = Write-Only.

COMMAND NAME / BIT NAME	CODE	BIT	VALUE	ACCESS	DATA BYTES	REMARKS
PAGE	00h		-	RW	1	Page 0 applies to + 12 V output Page 1 applies to + 3.3 V output Other Page values are considered invalid and will generate an INVALID_DATA error.
OPERATION	01h				1	
		7-6	-	RW		0b00 = OFF 0b10 = ON (Default)
		5-0	0d	R		Not Implemented
CLEAR_FAULTS	03h		-	W	0	Clear all bits in all status registers.
CAPABILITY	19h			R	1	
PACKET_ERROR_CHECKING		7	0b1			Supported
MAXIMUM_BUS_SPEED		6-5	0b01			400 kHz
SMBALERT#		4	0b1			Supported
RESERVED		3-0	0b0000			Reserved
VOUT_MODE	20h		-	R	1	
MODE		7-5	0b000			Linear
PARAMETER		4-0	0b10111			N = -9
FAN_CONFIG_1_2	3Ah			R	1	
		7	0b1			Fan1 Installed
		6	0b0			Fan1 Commanded in Duty Cycle
		5-4	0b01			Fan1 (2) Tachometer Pulses per Revolution
		3	0b0			Fan2 Not Installed
		2	0b0			Don't Care
		1-0	0b00			Don't Care
FAN_COMMAND_1	3Bh		-	RW	2	MIN = 0 → 0% MAX = 100 → 100% Values outside limits will generate INVALID_DATA error. Write request is executed only if the desired Fan speed is greater than what is required by the PSU. Fan Speed = FAN_COMMAND*21000RPM/100

© 2023 Bel Power Solutions

COMMAND NAME / BIT NAME	CODE	BIT	VALUE	ACCESS	DATA BYTES	REMARKS
STATUS_BYTE	78h			R	1	STATUS bits remain set, even if the fault or warning is removed. They are reset by: CLEAR_FAULTS Command AC Recycle PSON Recycle
BUSY		7	0b0			Not Implemented
OFF		6	-			
VOUT_OV		5	-			
IOUT_OC		4	-			
VIN_UV		3	-			
TEMPERATURE		2	-			
CML		1	-			
NONE_OF_THE_ABOVE		0	0b0			Not Implemented
STATUS_WORD	79h			R	2	
VOUT		F	-			
IOUT/POUT		E	-			
INPUT		D	-			
MFR		C	-			
POWER_GOOD#		B	-			
FANS		A	-			
OTHER		9	-			
UNKNOWN		8	0b0			Not Implemented
STATUS_BYTE		7-0	-			See STATUS_BYTE
STATUS_VOUT	7Ah			R	1	
VOUT_OV_FAULT		7	-			Asserts when an OV fault condition is detected on V1 output. SMB Alert Mask = 1 (Default)
VOUT_OV_WARNING		6	0b0			Not Implemented
VOUT_UV_WARNING		5	0b0			Not Implemented
VOUT_UV_FAULT		4	-			Asserts when an UV fault condition is detected on V1 output. SMB Alert Mask = 1 (Default)
VOUT_MAX_WARNING		3	0b0			Not Implemented
TON_MAX_FAULT		2	-			Asserts when V1 output is not in regulation 3s after PSON and AC is applied. SMB Alert Mask = 1 (Default)
TOFF_MAX_WARNING		1	0b0			Not Implemented
PWR_ON_TRACKING_ERROR		0	0b0			Not Implemented
STATUS_IOUT	7Bh			R	1	
IOUT_OC_FAULT		7	-			Asserts when an OC fault condition is detected on V1 output. SMB Alert Mask = 1 (Default)
IOUT_OC_FAULT_LV		6	0b0			Not Implemented
IOUT_OC_WARNING		5	0b0			Asserts when an OC warning condition is detected on V1 output. SMB Alert Mask = 0 (Default)
IOUT_UC_FAULT		4	0b0			Not Implemented
ISHARE_FAULT		3	0b0			Not Implemented
PIN_LIMITING_MODE		2	0b0			Not Implemented
POUT_OP_FAULT		1	0b0			Not Implemented
POUT_OP_WARNING		0	0b0			Not Implemented
STATUS_INPUT	7Ch			R	1	
VIN_OV_FAULT		7	0b0			Not Implemented
VIN_OV_WARNING		6	0b0			Not Implemented
VIN_UV_WARNING		5	0b0			Not Implemented

COMMAND NAME / BIT NAME	CODE	BIT	VALUE	ACCESS	DATA BYTES	REMARKS
VIN_UV_FAULT		4	0b0			Not Implemented
UNIT_OFF_VIN_LOW		3	-			Asserts when the PSU is disabled because of low input voltage. SMB Alert Mask = 1 (Default)
IIN_OC_FAULT		2	0b0			Not Implemented
IIN_OC_WARNING		1	0b0			Not Implemented
PIN_OP_WARNING		0	0b0			Not Implemented
STATUS_TEMPERATURE	7Dh			R	1	
OT_FAULT		7	-			Asserts when an OT fault condition is detected. SMB Alert Mask = 1 (Default)
OT_WARNING		6	-			Asserts when an OT warning condition is detected. SMB Alert Mask = 1 (Default)
UT_WARNING		5	0b0			Not Implemented
UT_FAULT		4	0b0			Not Implemented
RESERVED		3-0	0b0000			Reserved
STATUS_CML	7Eh			R	1	
INVALID_COMMAND		7	-			Asserts when the System tries to access unsupported commands, write to supported commands with read-only access, or read supported commands with write-only access. SMB Alert Mask = 0 (Default)
INVALID_DATA		6	-			Asserts when the System tries to write invalid data (including when PEC byte is incorrect) to supported commands with write access. SMB Alert Mask = 0 (Default)
PEC_FAIL		5	-			Asserts when the received PEC byte is incorrect. SMB Alert Mask = 0 (Default)
MEMORY_FAULT		4	0b0			Not Implemented
PROCESSOR_FAULT		3	0b0			Not Implemented
RESERVED		2	0b0			Reserved
OTHER_COMM_FAULT		1	0b0			Asserts when the communication between monitoring components inside the PSU is lost. SMB Alert Mask = 0 (Default)
OTHER_MEMORY_FAULT		0	0b0			Not Implemented
STATUS_OTHER	7Fh			R	1	
RESERVED		7	0b0			Reserved
RESERVED		6	0b0			Reserved
INPUT A FUSE		5	0b0			Not Implemented
INPUT B FUSE		4	0b0			Not Implemented
INPUT A ORING		3	0b0			Not Implemented
INPUT B ORING		2	0b0			Not Implemented
OUTPUT ORING		1	-			Asserts when a fault is detected on the V1 ORing device. SMB Alert Mask = 0 (Default)
RESERVED		0	0b0			Reserved
STATUS_MFR_SPECIFIC	80h			R	1	
RESERVED		7	0b0			Reserved
RESERVED		6	0b0			Reserved
RESERVED		5	0b0			Reserved
RESERVED		4	0b0			Reserved
VSB_UV_FAULT		3	-			Asserts when an UV fault condition is detected on Vsb output. SMB_Alert Mask = 0 (Default)
VSB_OV_FAULT		2	-			Asserts when an OV fault condition is detected on Vsb output. SMB_Alert Mask = 0 (Default)

© 2023 Bel Power Solutions

COMMAND NAME / BIT NAME	CODE	BIT	VALUE	ACCESS	DATA BYTES	REMARKS
PHASE_SHARE_FAULT		1	-			Asserts when there is a current imbalance between DCDC Phases. SMB_Alert Mask = 0 (Default)
HOLDUP_FAULT		0	-			Asserts when V1 goes out of regulation if Bulk voltage level is reduced. SMB_Alert Mask = 0 (Default)
STATUS_FANS_1_2	81h			R	1	
FAN1_FAULT		7	-			Asserts when a Fan fault condition is detected. SMB Alert Mask = 1 (Default)
FAN2_FAULT		6	0b0			Not Implemented
FAN1_WARNING		5	0b0			Not Implemented
FAN2_WARNING		4	0b0			Not Implemented
FAN1_SPEED_OVERRIDE		3	-			Asserts when the Fan is running according to the speed defined by the System. SMB Alert Mask = 0 (Default)
FAN2_SPEED_OVERRIDE		2	0b0			Not Implemented
AIR_FLOW_FAULT		1	0b0			Not Implemented
AIR_FLOW_WARNING		0	0b0			Not Implemented
READ_VIN	88h		-	R	2	Linear Format, N = -1
READ_IIN	89h		-	R	2	Linear Format, N = -6
READ_VOUT	8Bh		-	R	2	Linear Format, N = -9 Refer to Section 8.3.1 of PMBus® Spec Part II Revision 1.1
READ_IOUT	8Ch		-	R	2	Linear Format, N = -3
READ_TEMPERATURE_1	8Dh		-	R	2	Linear Format, N = -2 Inlet Temperature
READ_TEMPERATURE_2	8Eh		-	R	2	Linear Format, N = -2 Outlet Temperature
READ_TEMPERATURE_3	8Fh		-	R	2	Linear Format, N = -2 ORing FET Temperature
READ_FAN_SPEED_1	90h		-	R	2	Linear Format, N = 5
READ_POUT	96h		-	R	2	Linear Format, N = 1
READ_PIN	97h		-	R	2	Linear Format, N = 1
MFR_ID	99h		-	R	CNT+9	ID = Bel Power Format: ASCII
MFR_MODEL	9Ah		-	R	CNT+16	MODEL = PET1300-12-054xA Format: ASCII
MFR_REVISION	9Bh		-	R	CNT+3	REVISION = vvv Format: ASCII
MFR_LOCATION	9Ch		-	R	2	LOCATION = xx Format: ASCII
MFR_DATE	9Dh		-	R	CNT+4	DATE = yyww Format: ASCII
MFR_SERIAL	9Eh		-	R	CNT+18	SERIAL = xxzzzzzzzzvvvuuuuu Format: ASCII
CALIBRATION_POINTER	C0h		-	RW	2	**For Bel Power Solutions Use Only**
CALIBRATION_DATA	C1h		-	RW	2	**For Bel Power Solutions Use Only**
CALIBRATION_COMMAND	C2h		-		2	**For Bel Power Solutions Use Only**
RESERVED		F-1	0d	R		Reserved
COMMIT_TO_FLASH		0	-	RW		0 = No Action 1 = Commit RAM to Flash
READ_VSTBY	C3h		-	R	2	**For Bel Power Solutions Use Only** Same format as READ_VOUT
READ_ISTBY	C4h		-	R	2	**For Bel Power Solutions Use Only** Same format as READ_IOUT
READ_VOUT_INT	C5h		-	R	2	**For Bel Power Solutions Use Only** Same format as READ_VOUT
BOOTLOADER_STATUS_REQUEST	C7h			RW	2	**For Bel Power Solutions Use Only**
BOOTLOADER_PAGE_DATA	C8h		-	W	-	**For Bel Power Solutions Use Only**
PRODUCT_ID_NUMBER	C9h			R	2	**For Bel Power Solutions Use Only**

COMMAND NAME / BIT NAME	CODE	BIT	VALUE	ACCESS	DATA BYTES	REMARKS
						Refer to Table 3
FW_REV	CAh			R	2	**For Bel Power Solutions Use Only**
SEC_DSP_MAJOR		F-C	-			M = 0 to 9
SEC_DSP_MINOR		B-8	-			m = 0 to 9 i.e: Mm = 25 → Revision 2.5
PRI_DSP_MAJOR		7-4	-			M = 0 to 9
PRI_DSP_MINOR		3-0	-			m = 0 to 9 i.e: Mm = 13 → Revision1.3
SEC_CTRL1	CCh			R		**For Bel Power Solutions Use Only**
SEC_CTRL2	CDh			R		**For Bel Power Solutions Use Only**
SEC_STAT	CEh			R		**For Bel Power Solutions Use Only**
PRI_STAT	CFh			R		**For Bel Power Solutions Use Only**
MFR_SPECIFIC_00 (PSU_CONTROL)	D0h				2	
RESERVED		F-1	0d	R		Reserved
EEPROM_WP		0	-	RW		EEP Write-Protect (WP) Control 0 = Enable WP (Default) 1 = Disable WP
MFR_SPECIFIC_05 (FW_VERSION)	D5h		-	R	8	Format: xx.xx.xx (e.g. 01.02.01). The length is fixed at 8 Ascii characters. Each field will be an Ascii value stored in one byte. * For example: aa.bb.cc, where aa is development stage (P0, P1 ... A0); bb is primary mcu firmware revision (00 ~ 99); cc is secondary mcu firmware revision (00 ~ 99). **NO BYTE COUNT**
MFR_SPECIFIC_09 (SMB_ALERT_MASKING)	D9h		-	RW	7	Refer to Table 4 **NO BYTE COUNT**

Table 9. PMBus® Commands

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.
TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Asia-Pacific +86 755 298 85888
Europe, Middle East +353 61 49 8941
North America +1 866 513 2839

© 2023 Bel Power Solutions