

**SERIES:** PSC150W | **DESCRIPTION:** DC-DC CONVERTER

**FEATURES**


- 150 W isolated output
- industry standard 1/4 brick package
- 12:1 input range (14~160 Vdc)
- over current, over temperature, over voltage, short circuit, and input UVLO protections
- remote on/off, output voltage trim, output remote voltage sense
- base plate cooling
- wide operating temperature range (-40 ~ 105°C)
- EN/IEC 62368 certified
- designed to meet EN 50155 and EN 45545-2 railway standards



MODEL	input voltage range (Vdc)	output voltage (Vdc)	output current max (A)	output power max (W)	ripple and noise <sup>1</sup> max (mVp-p)	efficiency <sup>2</sup> typ (%)
PSC150W-110-S12	14~160	12	12.5	150	200	88.5
PSC150W-110-S24	14~160	24	6.25	150	240	87.5
PSC150W-110-S48	14~160	48	3.125	150	480	87.5
PSC150W-110-S54	14~160	54	2.778	150	540	87.5

Note: 1. Ripple and noise are measured at 20 MHz BW with 4.7μF\*6 capacitor.  
 2. At nominal input and full load.  
 3. All specifications are measured at Ta=25°C, nominal input voltage and full output load unless otherwise specified.

**PART NUMBER KEY**

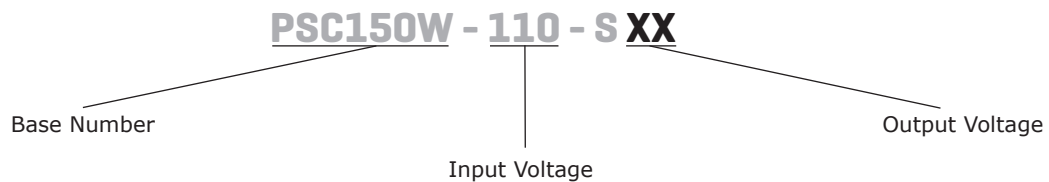

## INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage		14	110	160	Vdc
no load input current				15	mA
surge voltage	0.1s max			200	Vdc
under voltage shutdown	0% ~ 100% load		12		Vdc
capacitance filter	Pi filter				
remote on/off	models ON: (Pin open or $3V < V_r < 12V$ ) models OFF: (Short or $0V < V_r < 1.2V$ )				
capacitance filter	Pi filter				

## OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load <sup>4</sup>	12 Vdc output models			5,000	$\mu$ F
	24 Vdc output models			2,000	$\mu$ F
	48 & 54 Vdc output models			1,000	$\mu$ F
line regulation	measured from high line to low line		$\pm 0.2$		%
load regulation	measured from 0% ~ 100% load		$\pm 0.5$		%
start-up voltage	0% ~ 100% load			14	Vdc
start-up time	at 100% load, nominal $V_{in}$	100		300	ms
voltage accuracy			$\pm 1$		%
switching frequency	at 100% load, $V_{in}$ range		250		kHz
voltage adjustability	0% ~ 100% load at $V_{in}$ range $P_{out} \leq \text{max rated power}$		$\pm 10$		%
transient response	75 ~ 100% step load change		500		$\mu$ s
temperature coefficient				$\pm 0.05$	%/ $^{\circ}$ C

Note: 4. The capacitive load is test by minimum input and constant resistive load.

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection	at 110 Vdc		150		%
over voltage protection	12 Vdc ouptut model, at 110 Vdc	13.4		18.0	Vdc
	24 Vdc ouptut model, at 110 Vdc	26.9		36.0	Vdc
	48 Vdc ouptut model, at 110 Vdc	53.8		72.0	Vdc
	54 Vdc ouptut model, over voltage 112~150% Vdc	60.5		81.0	Vdc
short circuit protection	auto recovery, continuous				
over temperature protection	case temperature			115	$^{\circ}$ C

## SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output, for 1 minute, 5 mA max	3,000			Vac
	input or output to case (base plate), for 1 minute, 5 mA max	1,500			Vac
isolation capacitance				3,000	pF
safety approvals	certified to 62368: EN, IEC				
EMI <sup>5</sup>	EN50121-3-2/ EN55032 Class A/B				
ESD	EN 61000-4-2, air $\pm 8kV$ , contact $\pm 6kV$ , Criteria A				
radiated immunity	EN 61000-4-3, 10V/m, Criteria A				
conducted immunity	EN 61000-4-6, 10Vrms, Criteria A				
fast transient <sup>6</sup>	EN 61000-4-4, $\pm 2kV$ , perf. criteria A				



## UVLO EXTERNAL RESISTOR

Figure 3


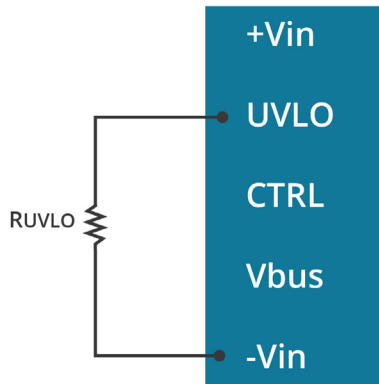


Table 2

UVLO External resistor $R_{UVLO}$ ( $\Omega$ )	Open	125 K	62 K	27 K
Turn-off threshold	12 V	19.8 V	26.2 V	36.3 V
Turn-on threshold	13.8 V	22.2 V	28.7 V	39 V

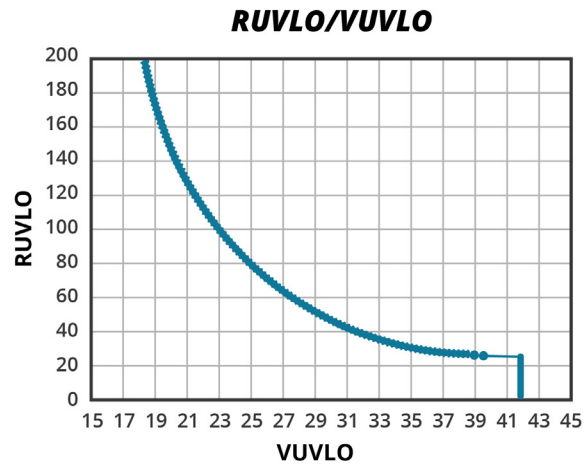

Note: The under voltage threshold can set by external resistor placed between the UVLO and -Vin.

## EMC CLASS A RECOMMENDED CIRCUIT

Figure 4

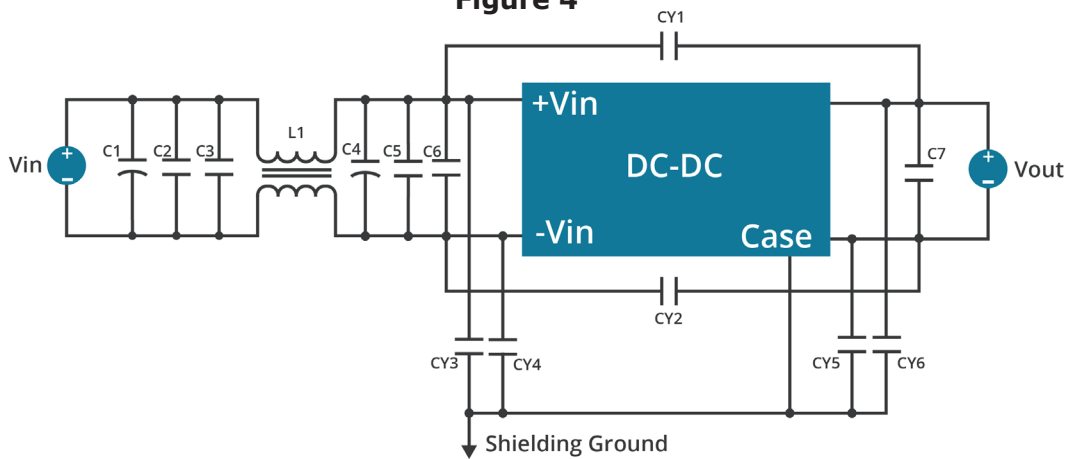


Table 3

Vout	C1, C4	C2, C3, C5, C6	C7	CY1, CY2	CY3, CY4, CY5, CY6	L1
12 V	100 $\mu$ F 200V Aluminum Cap	0.68 $\mu$ F 1210 250V Ceramic Cap	4.7 $\mu$ F 1210 100V x 6 parallel Ceramic Cap	1000pF 2211 5KV Ceramic Cap	1200pF 2211 3KV x 4 parallel Ceramic Cap	Common Choke A10 2.0mH $\pm$ 35%
24 V	220 $\mu$ F 200V Aluminum Cap	0.68 $\mu$ F 1210 250V Ceramic Cap	4.7 $\mu$ F 1210 100V x 6 Parallel Ceramic Cap	1000pF 2211 5KV Ceramic Cap	1200pF 2211 3KV x 4 parallel Ceramic Cap	Common Choke A10 2.0mH $\pm$ 35%
48 V	220 $\mu$ F 200V Aluminum Cap	0.68 $\mu$ F 1210 250V Ceramic Cap	4.7 $\mu$ F 1210 100V x 6 Parallel Ceramic Cap	1000pF 2211 5KV Ceramic Cap	1200pF 2211 3KV x 5 parallel Ceramic Cap	Common Choke A10 2.0mH $\pm$ 35%
54 V						

## EMC CLASS B RECOMMENDED CIRCUIT

Figure 5

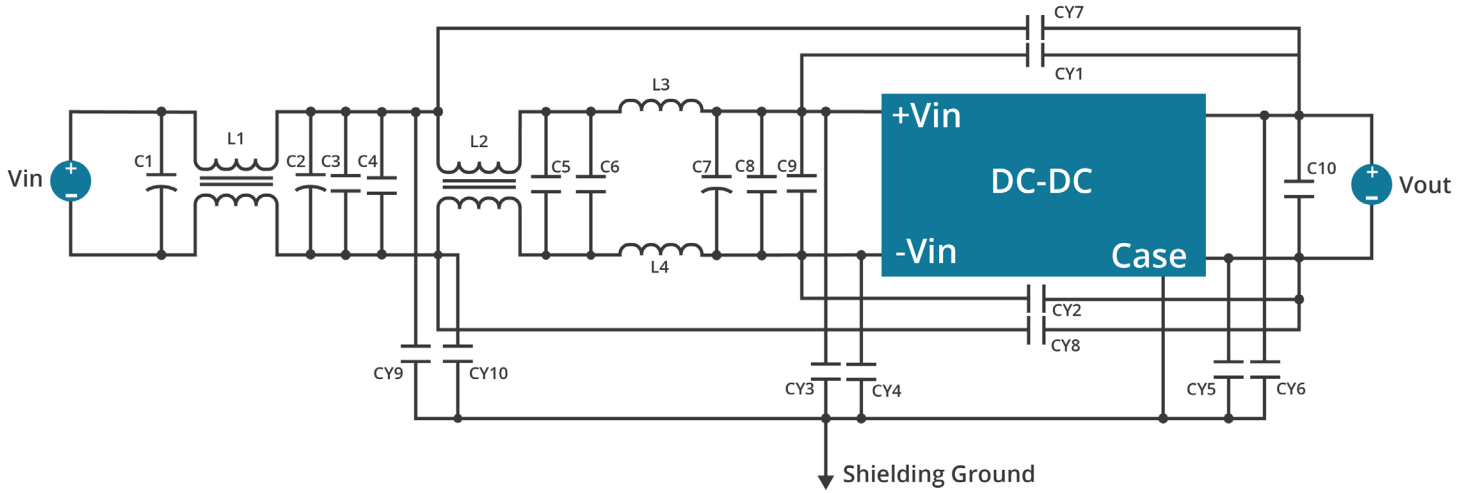



Table 4

Vout	C1, C2, C7	C3, C4, C5, C6, C8, C9	C10	CY1	CY2	CY3, CY4, CY5, CY6	CY7, CY8	CY9, CY10	L1, L2	L3, L4
12 V	100µF 200V Aluminum Cap	0.68µF 1210 250V Ceramic Cap	4.7µF 1210 100V x 6 parallel Ceramic Cap	2200pF 2211 5KV Ceramic Cap	1000pF 2211 5KV Ceramic Cap	2200pF 2211 3KV x 4 parallel Ceramic Cap	470pF 2211 5KV Ceramic Cap	-	Common Choke A10 2.0mH ±35%	4.7µH
24 V 48 V 54 V	100µF 200V Aluminum Cap	0.68µF 1210 250V Ceramic Cap	4.7µF 1210 100V x 6 Parallel Ceramic Cap	2200pF 2211 5KV Ceramic Cap	1000pF 2211 5KV Ceramic Cap	2200pF 2211 3KV x 6 parallel Ceramic Cap	-	330pF 2211 3KV Ceramic Cap	Common Choke A10 2.0mH ±35%	4.7µH


## APPLICATION NOTES

Figure 6

Trim up

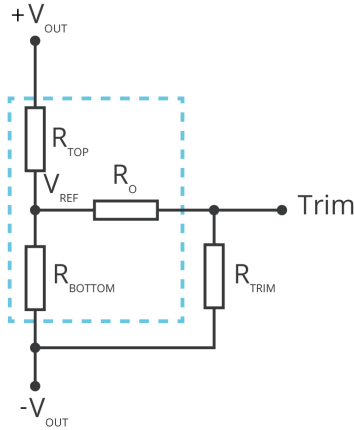

Trim down

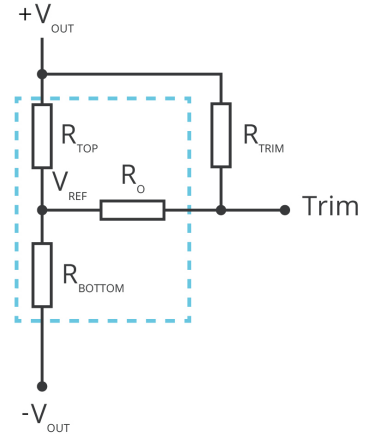

$$R_{TRIM} = \frac{a \cdot R_{BOTTOM}}{R_{BOTTOM} - a} - R_O \quad a = \frac{V_{REF}}{V_{OUT} - V_{REF}} \cdot R_{TOP}$$

Formula for Trim up

$$R_{TRIM} = \frac{a \cdot R_{TOP}}{R_{TOP} - a} - R_O \quad a = \frac{V_{OUT} - V_{REF}}{V_{REF}} \cdot R_{BOTTOM}$$

Formula for Trim down

Table 5

$V_{OUT}$ (Vdc)	$R_{TOP}$ (k $\Omega$ )	$R_{BOTTOM}$ (k $\Omega$ )	$R_O$ (k $\Omega$ )	$V_{REF}$ (V)
12	38	10	68	2.5
24	86	10	76.8	2.5
48	182	10	80.6	2.5
54	206.1	10	82	2.5

Note: Value for  $R_{TOP}$ ,  $R_{BOTTOM}$ ,  $R_O$ , and  $V_{REF}$  refer to Table 6 (fixed internal values).

$R_{TRIM}$ : Trim resistance

$a$ : User-defined parameter, no actual meanings

$V_{OUT}$ : Target output voltage


## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	57.9 x 36.8 x 12.7				mm
base plate material	aluminum base-plate with plastic case				
potting material	silicon				
weight			75		g

## MECHANICAL DRAWING


units: mm  
 general tolerance: ±0.25 mm

PIN CONNECTIONS CN1 & CN2	
PIN	FUNCTION
1	+Vin
2	UVLO
3	CTRL
4	Vbus
5	-Vin
6	-Vout
7	-S
8	Trim
9	+S
10	+Vout

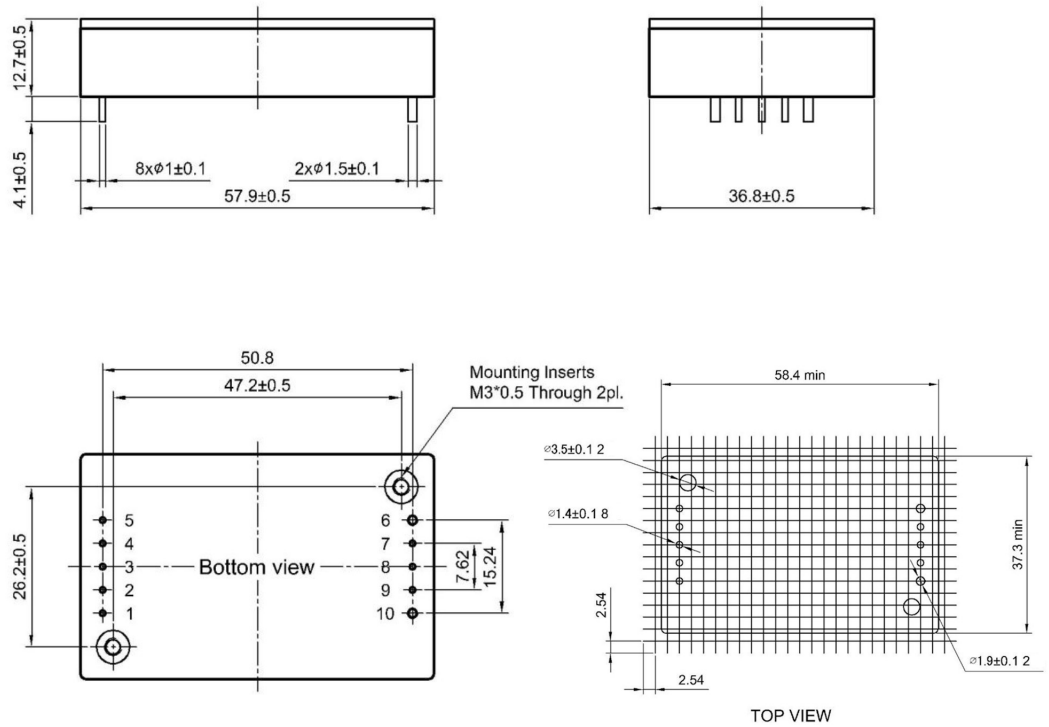


## DERATING CURVES


**TEMPERATURE DERATING CURVE**  
baseplate temperature

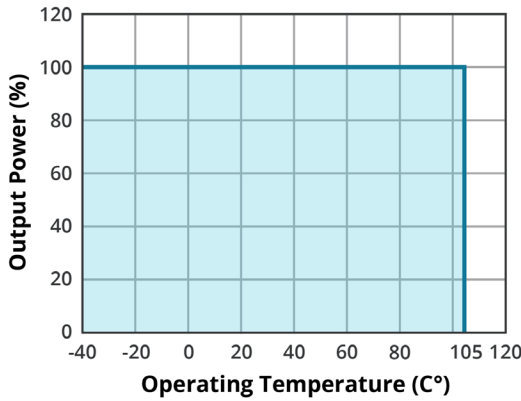


**TEMPERATURE DERATING CURVE**  
without heatsink

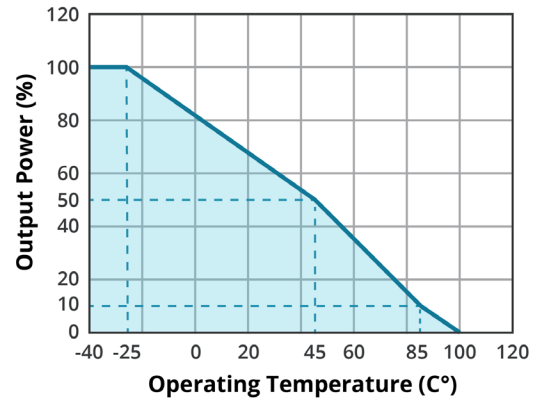


**TEMPERATURE DERATING CURVE**  
PSC150W-110-S12  
( at 110 Vin)

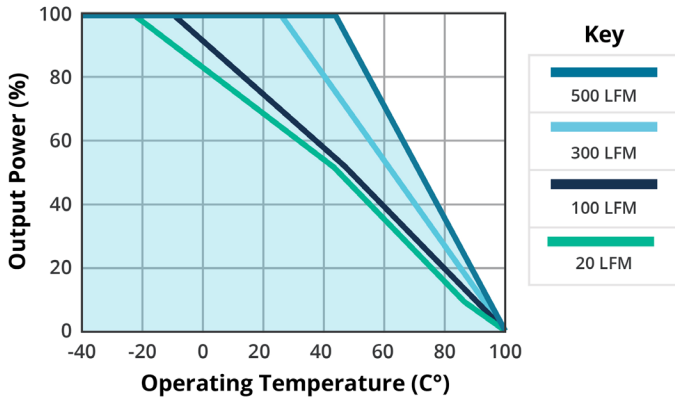


**TEMPERATURE DERATING CURVE**  
PSC150W-110-S24  
( at 110 Vin)

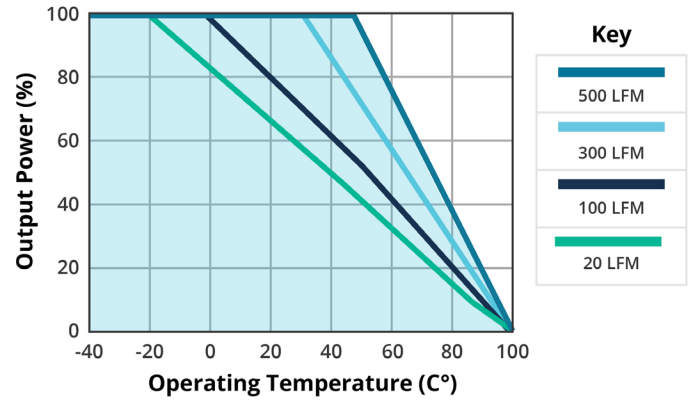

**TEMPERATURE DERATING CURVE**  
PSC150W-110-S48  
( at 110 Vin)

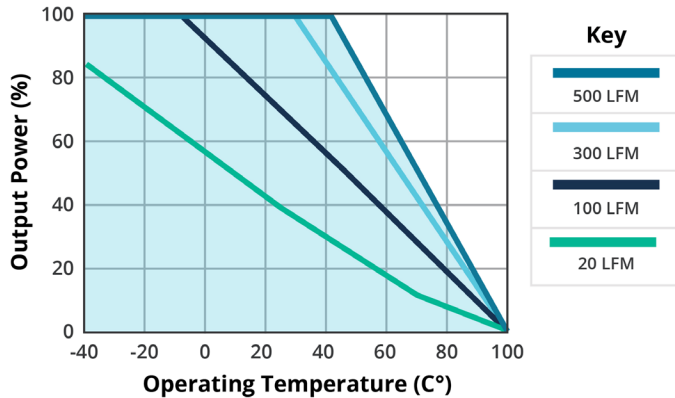


**TEMPERATURE DERATING CURVE**  
PSC150W-110-S54  
( at 110 Vin)

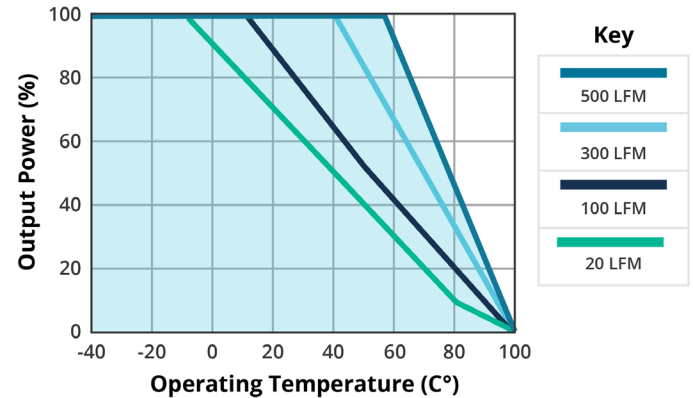


## EFFICIENCY CURVES


**EFFICIENCY VS OUTPUT LOAD**  
(at 25°C, Vin = 110V, Vo = 12V, Io = 12.5A)

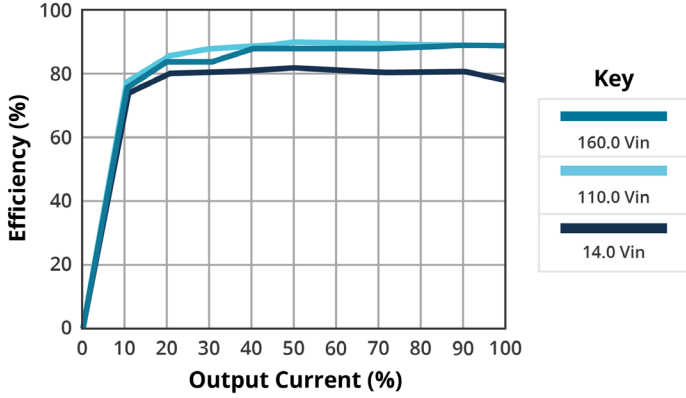


**EFFICIENCY VS OUTPUT LOAD**  
(at 25°C, Vin = 110V, Vo = 24V, Io = 6.25A)

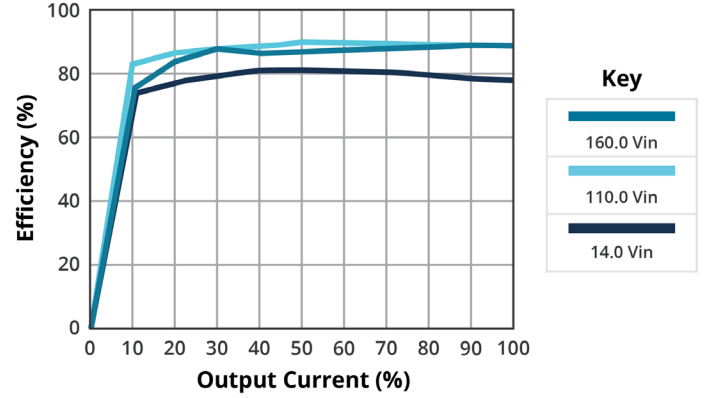

**EFFICIENCY VS OUTPUT LOAD**  
(at 25°C, Vin = 110V, Vo = 48V, Io = 3.125A)

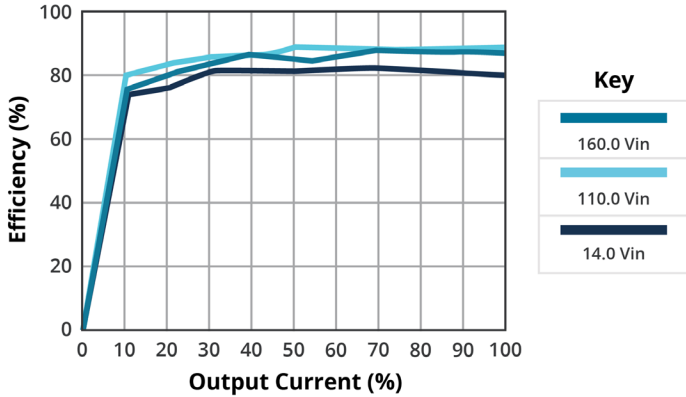

**EFFICIENCY VS OUTPUT LOAD**  
(at 25°C, Vin = 110V, Vo = 54V, Io = 2.778A)

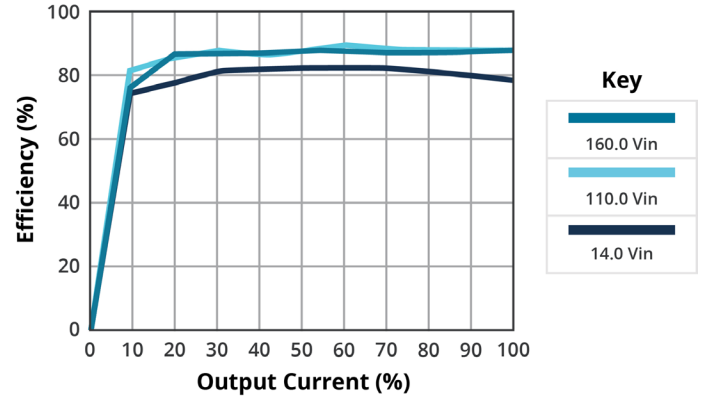

## REVISION HISTORY

rev.	description	date
1.0	initial release	02/02/2024
1.01	company address updated	11/14/2024
1.02	datasheet updated	05/29/2025
1.03	UVLO updated	12/20/2025

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**

a bel group

15575 SW Sequoia Pkwy #100  
Portland, OR 97224  
800.275.4899

Fax 503.612.2383  
Belfuse.com  
powersupport@belf.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Please read our datasheet & drawing disclaimer [here](#).