



**SERIES: PSK-10E | DESCRIPTION: INTERNAL AC-DC POWER SUPPLY**
**FEATURES**

- universal input 85~305 Vac & 100~430 Vdc
- wide operating temperature range (-40~85°C)
- Class B emissions (EN55032/CISPR) with application circuit
- certified to IEC/EN/UL 62368-1
- isolation voltage 4,000 Vac
- short circuit, over voltage and over current protection
- input under voltage protection
- Class II
- low stand-by power consumption (<0.1 W)
- 2,000 m operating altitude
- high efficiency up to 85%
- OVC III

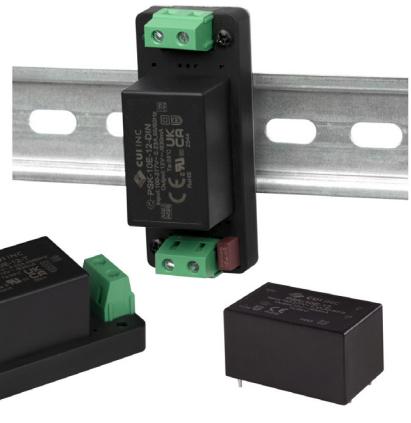

MODEL	output voltage (Vdc)	output current max (A)	output power max (W)	ripple and noise <sup>1</sup> max (mVp-p)	efficiency <sup>2</sup> typ (%)
PSK-10E-3	3.3	2.60	8.6	150	75
PSK-10E-5	5	2.00	10	150	79
PSK-10E-9	9	1.10	10	150	81
PSK-10E-12	12	0.83	10	150	83
PSK-10E-15	15	0.66	10	150	84
PSK-10E-24	24	0.41	10	150	85

Notes: 1. Ripple & noise are measured at 20 MHz BW.  
2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product.  
3. Unless otherwise specified, all indicators in this manual are measured at Ta=25 °C, humidity<75% RH, nominal input voltage, and output rated load.

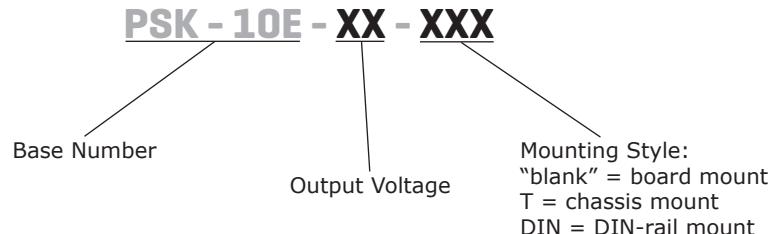**PART NUMBER KEY**


**INPUT**

parameter	conditions/description	min	typ	max	units
voltage <sup>4</sup>	ac input dc input	85 100		305 430	Vac Vdc
frequency		47	50~60	63	Hz
current	110 Vac 230 Vac			0.3 0.15	A A
external input fuse	2 A/300 V, slow-blow, required				
leakage current	230 Vac/50 Hz			0.1	mA
no load power consumption	at 230 Vac			0.1	W

Notes: 4. The input voltage should not exceed the specified range value to prevent permanent and irreparable damage.

**OUTPUT**

parameter	conditions/description	min	typ	max	units
	3.3 Vdc output model			6,000	µF
	5 Vdc output model			5,000	µF
	9 Vdc output model			3,600	µF
capacitive load	12 Vdc output model			2,000	µF
	15 Vdc output model			820	µF
	24 Vdc output model			470	µF
output voltage accuracy	10% ~ 100% load		±2		%
line regulation			±0.5		%
load regulation	0% ~ 100% load		±1.0		%
hold-up time	at 230 Vac		40		ms
temperature coefficient			±0.02		%/°C

**PROTECTIONS**

parameter	conditions/description	min	typ	max	units
over current protection	auto recovery	110			%
short circuit protection	continuous, auto recovery				

**SAFETY & COMPLIANCE**

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output, for 1 minute, 5mA max	4,000			Vac
safety approvals	certified to 62368-1: IEC, EN, UL designed to meet 61558: EN designed to meet 60335: EN				
safety class	Class II				
EMI/EMC	CISPR32/EN55032 CLASS B				
ESD	IEC/EN61000-4-2 Contact ±8 kV/Air ±15 kV, perf. Criteria A				
radiated immunity	IEC/EN61000-4-3 10 V/m, perf. Criteria B				
EFT/burst	IEC/EN61000-4-4 ±4 kV (see recommended circuit Fig. 2 ), perf. Criteria B				
surge	IEC/EN61000-4-5 line to line ±1 kV, perf. Criteria B IEC/EN61000-4-5 line to line ±2 kV, (see recommended circuit Fig. 2 ), perf. Criteria B				
conducted immunity	IEC/EN61000-4-6 10 Vrms, perf. Criteria B				
MTBF	MIL-HDBK-217F at 25°C	3,200,000			hours
RoHS	yes				

## ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature		-40		85	°C
storage temperature		-40		85	°C
storage humidity	non-condensing	0		95	%

## SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	5~10 seconds max	255	260	265	°C
hand soldering	3~5 seconds max	350	360	370	°C

## MECHANICAL


parameter	conditions/description	min	typ	max	units
dimensions	board mount: 40.0 x 25.40 x 21.50 [1.575 x 1.000 x 0.846 inch] chassis mount: 76.0 x 31.50 x 30.30 [2.992 x 1.240 x 1.193 inch] DIN-rail mount: 76.0 x 31.50 x 34.90 [2.992 x 1.240 x 1.374 inch]				mm
weight	board mount chassis mount DIN-rail mount	36.6 59.61 79.42			g
case material	black plastic, flame-retardant and heat-resistant (UL94V-0)				
cooling	natural convection				

## MECHANICAL DRAWING

units: mm [inch]

pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

PIN CONNECTIONS	
PIN	Function
1	AC(L)
2	AC(N)
3	no pin
4	+Vo
5	no pin
6	-Vo

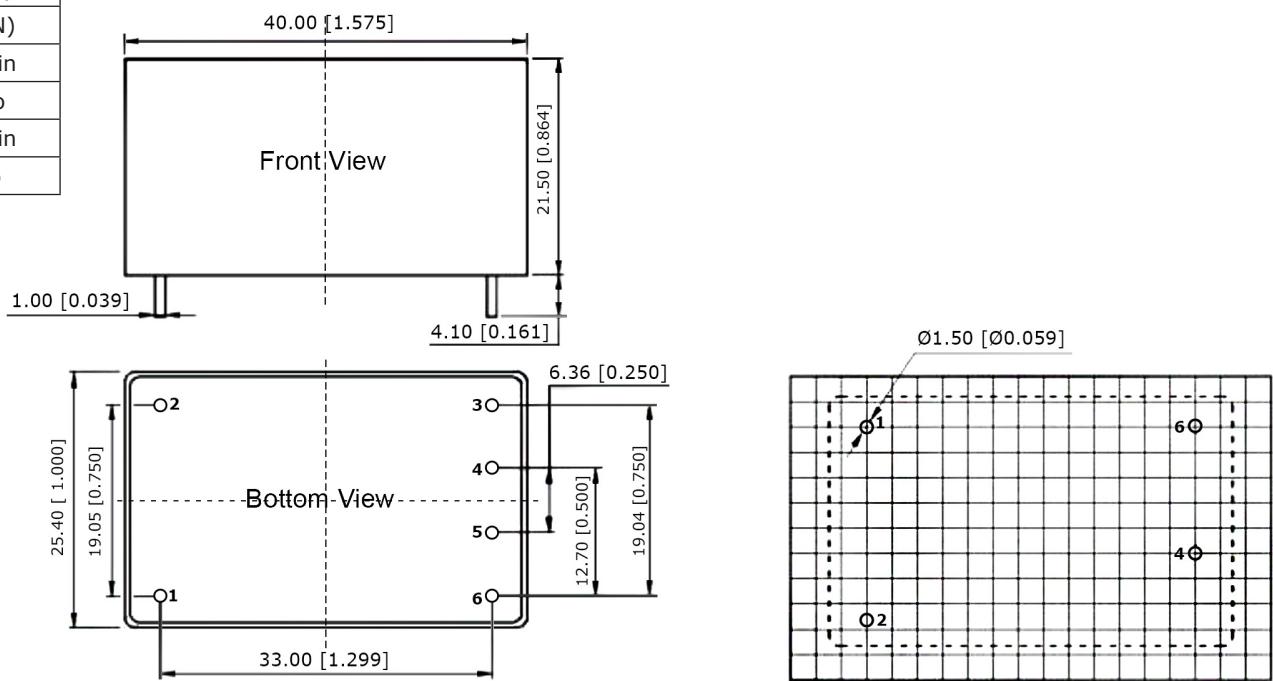

Grid size: 2.54\*2.54mm

## **MECHANICAL DRAWING (CONTINUED)**



## Chassis mount

units: mm [inch]

pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]

tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

PIN CONNECTIONS	
PIN	Function
1	AC(L)
2	AC(N)
3	-Vo
4	+Vo

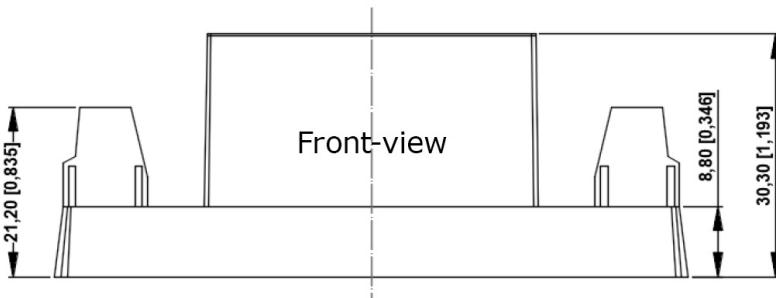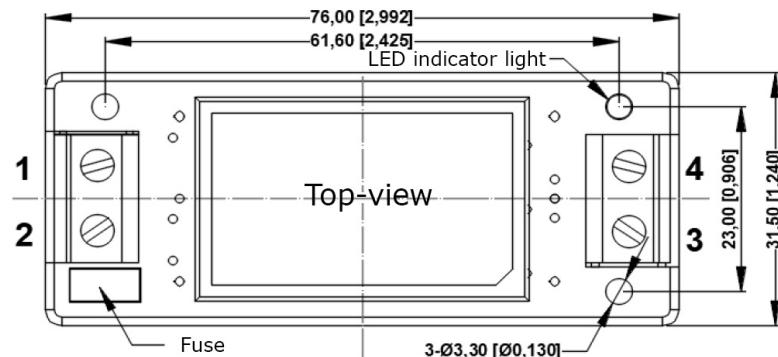



## DIN-rail mount

units: mm [inch]



pin diameter tol

tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]



PIN CONNECTIONS	
PIN	Function
1	AC(L)
2	AC(N)
3	-Vo
4	+Vo

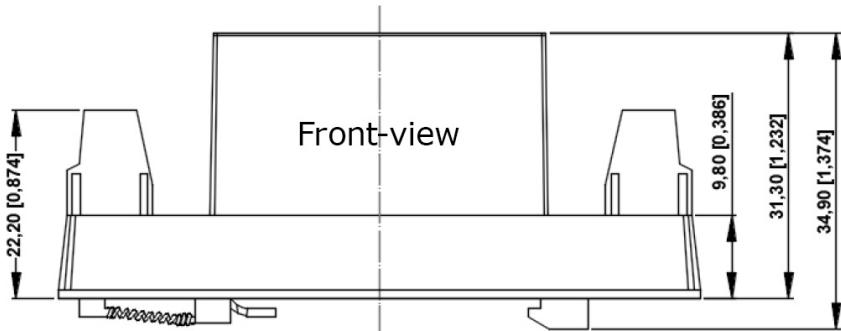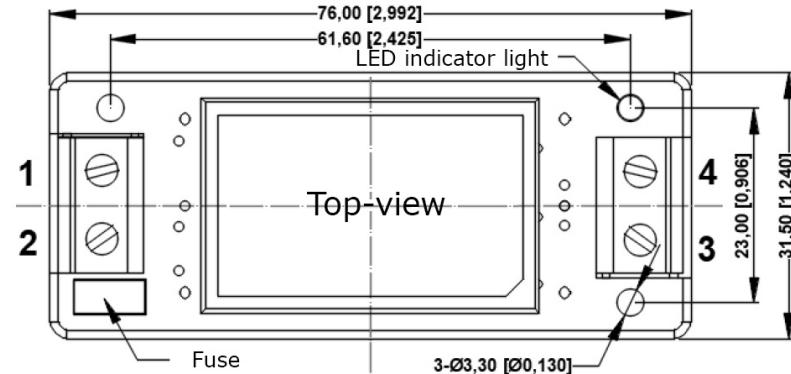

## DERATING CURVE

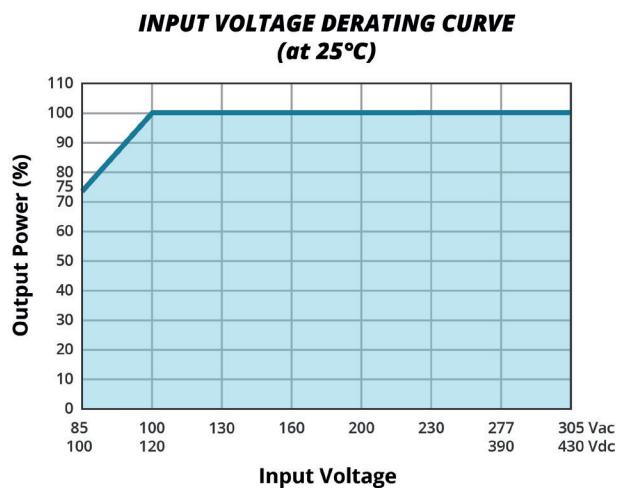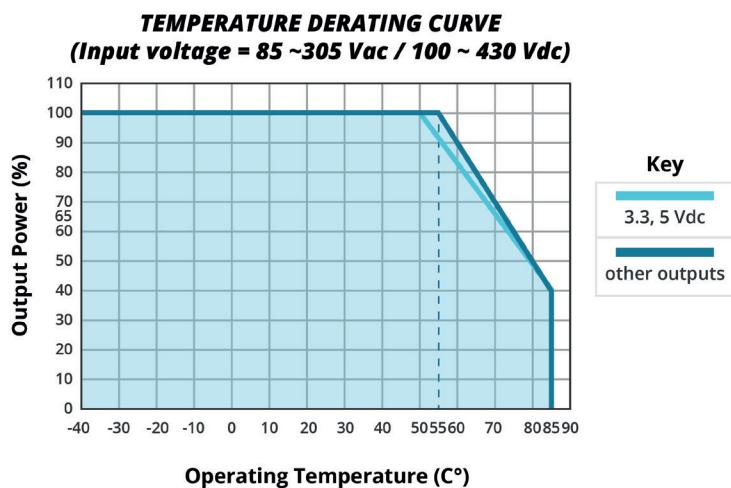

## EFFICIENCY CURVES

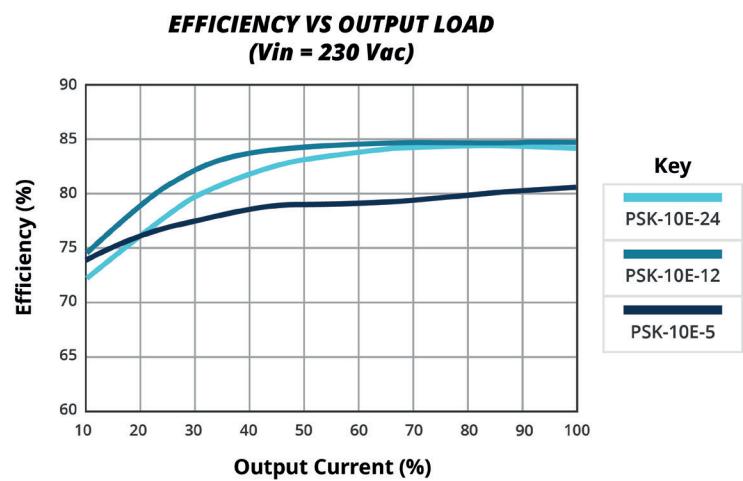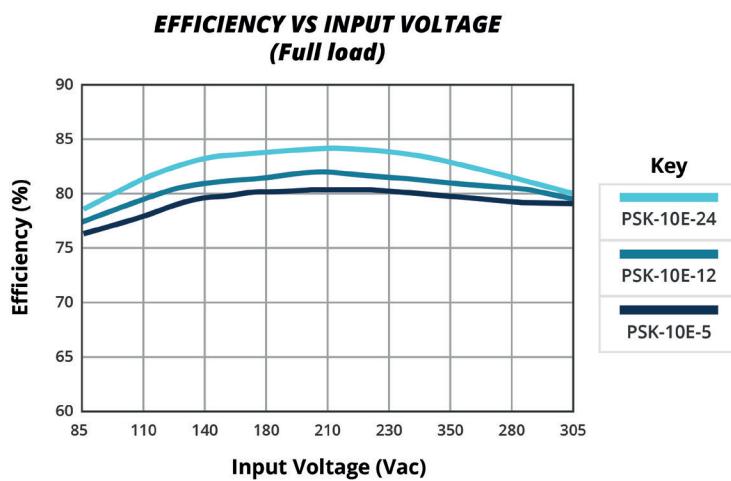

## APPLICATION DESIGN REFERENCE

Figure 1

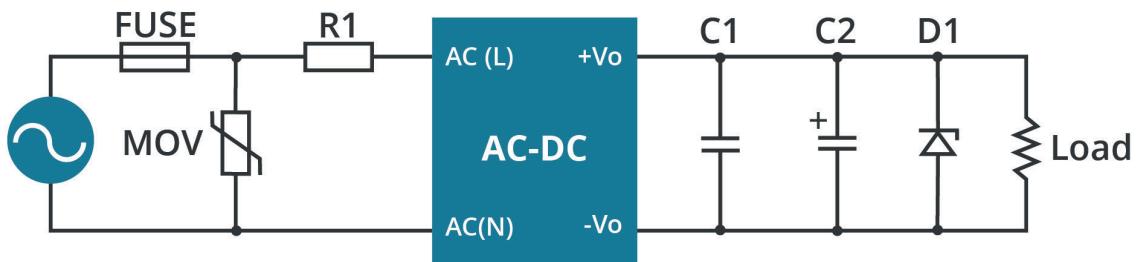


Table 1

Vout (Vdc)	FUSE	MOV	R1	C1 ( $\mu$ F/V)	C2( $\mu$ F/V)	D1
5	1A/300V, slow-blow, required	14D561K	6.8 $\Omega$ /5W (wire-wound resistor, required)	1 $\mu$ F/16 V	220 $\mu$ F/16 V	see note 2
9, 12				1 $\mu$ F/25 V	150 $\mu$ F/25 V	
15, 24				1 $\mu$ F/50 V	100 $\mu$ F/35 V	

Notes: 1. Fuse and MOV should be selected based on application requirements and performance criteria.  
2. D1 is a TVS transistor that can protect the downstream circuit in case of module abnormalities. It is recommended to choose a model that is 1.2 times the output voltage.

## EMC RECOMMENDED CIRCUIT

Figure 2

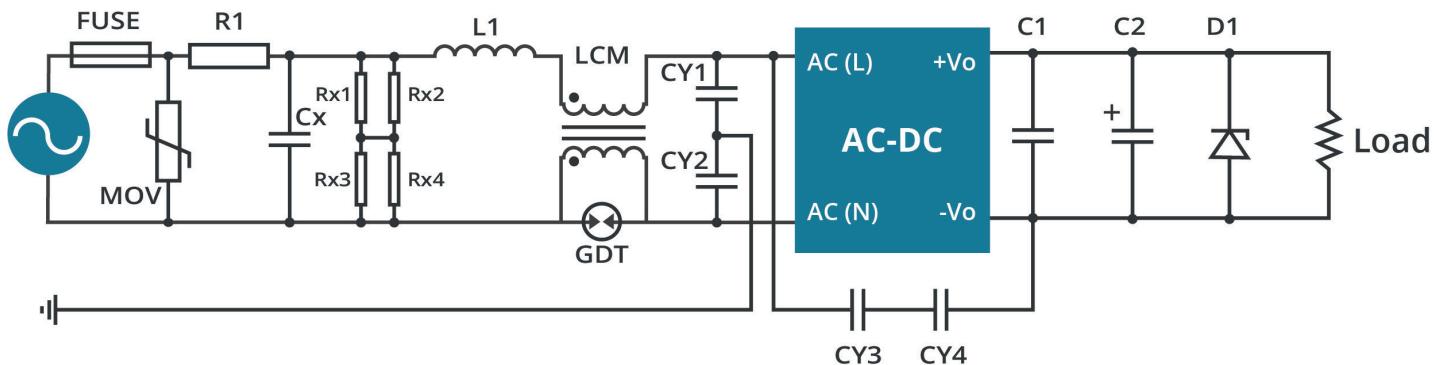


Table 2

Components	Recommended Value
FUSE	2A/300V, slow-blow, required
MOV	14D561K
Cx	0.33 $\mu$ F/305 Vac
R1	12 $\Omega$ /5W (wire wound resistor, required)
L1	1.2 mH/0.5 A
CY1, CY2	2.2 nF/400 Vac
CY3, CY4	1.0 nF/400 Vac
GDT	300 V/1 kA
LCM	22 mH Common mode Choke
Rx1, Rx2, Rx3, Rx4	2 M $\Omega$ /1206

## REVISION HISTORY

rev.	description	date
1.0	initial release	06/03/2025
1.01	chassis and DIN-rail mount added	01/19/2026

The revision history provided is for informational purposes only and is believed to be accurate.



15575 SW Sequoia Pkwy #100  
Portland, OR 97224  
800.275.4899

Fax 503.612.2383  
Belfuse.com  
powersupport@belf.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.