


SERIES: VAD3 | **DESCRIPTION:** DC-DC CONVERTER

FEATURES

- 3W isolated output
- efficiency to 80%
- regulated outputs
- Pi input filter
- low ripple and noise
- 24-pin DIP package
- continuous short circuit protection

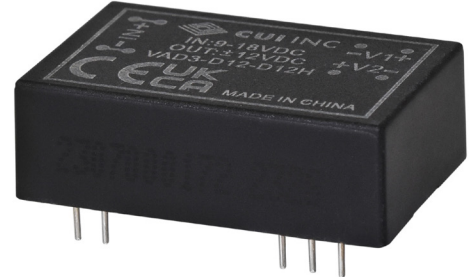


MODEL	input voltage		output voltage	output current	output power	ripple & noise ¹	efficiency
	typ (Vdc)	range (Vdc)	(Vdc)	max (mA)	max (W)	max (mVp-p)	typ (%)
VAD3-D5-S3R3	4.5~6	5	3.3	600	3	100	64
VAD3-D5-S5	4.5~6	5	5	600	3	100	70
VAD3-D5-S12	4.5~6	5	12	250	3	100	75
VAD3-D5-S15	4.5~6	5	15	200	3	100	75
VAD3-D5-D5	4.5~6	5	±5	±300	3	100	70
VAD3-D5-D12	4.5~6	5	±12	±125	3	100	75
VAD3-D5-D15	4.5~6	5	±15	±100	3	100	75
VAD3-D12-S3R3	9~18	12	3.3	600	3	100	70
VAD3-D12-S5	9~18	12	5	600	3	100	73
VAD3-D12-S12	9~18	12	12	250	3	100	78
VAD3-D12-S15	9~18	12	15	200	3	100	78
VAD3-D12-D5	9~18	12	±5	±300	3	100	73
VAD3-D12-D12	9~18	12	±12	±125	3	100	78
VAD3-D12-D15	9~18	12	±15	±100	3	100	78
VAD3-D24-S3R3	18~36	24	3.3	600	3	100	73
VAD3-D24-S5	18~36	24	5	600	3	100	74
VAD3-D24-S12	18~36	24	12	250	3	100	80
VAD3-D24-S15	18~36	24	15	200	3	100	80
VAD3-D24-D5	18~36	24	±5	±300	3	100	74
VAD3-D24-D12	18~36	24	±12	±125	3	100	80
VAD3-D24-D15	18~36	24	±15	±100	3	100	80
VAD3-D48-S3R3	36~72	48	3.3	600	3	100	71
VAD3-D48-S5	36~72	48	5	600	3	100	76
VAD3-D48-S12	36~72	48	12	250	3	100	80
VAD3-D48-S15	36~72	48	15	200	3	100	80

MODEL	input voltage		output voltage	output current	output power	ripple & noise ¹	efficiency
	typ (Vdc)	range (Vdc)	(Vdc)	max (mA)	max (W)	max (mVp-p)	typ (%)
VAD3-D48-D5	36~72	48	±5	±300	3	100	76
VAD3-D48-D12	36~72	48	±12	±125	3	100	78
VAD3-D48-D15	36~72	48	±15	±100	3	100	78

Notes: 1. With 20MHz bandwidth.

PART NUMBER KEY

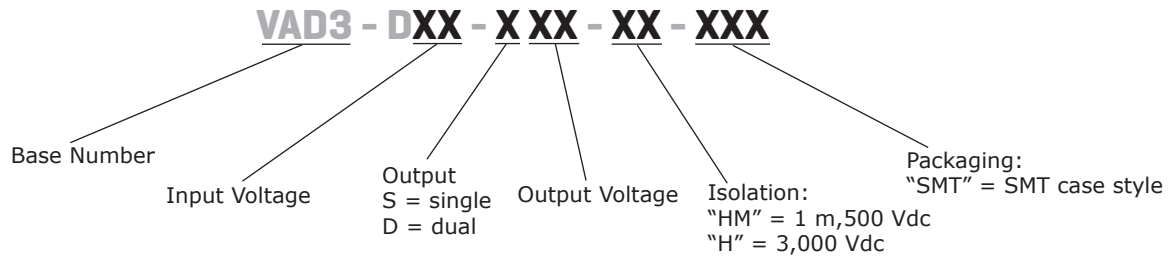

INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	5 Vdc input	4.5	5	6	Vdc
	12 Vdc input	9	12	18	Vdc
	24 Vdc input	18	24	36	Vdc
	48 Vdc input	36	48	75	Vdc
input current (no load/full load)	5 Vdc input	3.3 Vdc output		15/619	mA
		5 Vdc output		15/850	mA
		12, 15 Vdc output		15/800	mA
	12 Vdc input	±5 Vdc output		25/850	mA
		±12, ±15 Vdc output		25/800	mA
		3.3 Vdc output		7.5/236	mA
input filter	24 Vdc input	5 Vdc output		7.5/340	mA
		12, 15 Vdc output		7.5/320	mA
		±5 Vdc output		12/340	mA
	48 Vdc input	±12, ±15 Vdc output		12/320	mA
		3.3 Vdc output		5/113	mA
		5 Vdc output		5/168	mA
input filter	5 Vdc input	12, 15 Vdc output		5/156	mA
		±5 Vdc output		7.5/168	mA
		±12, ±15 Vdc output		7.5/156	mA
	Pi filter	5 Vdc output		2/82	mA
		12, 15 Vdc output		2/78	mA
		3.3 Vdc output		3/58	mA
input filter	Pi filter	±5 Vdc output		3/82	mA
		±12, ±15 Vdc output		3/80	mA

OUTPUT

parameter	conditions/description	min	typ	max	units
voltage accuracy				±2	%
voltage balance (dual)				±1	%
temperature coefficient				±0.05	%/°C
line regulation	low line to high line at full load				
	single output		±0.5		%
	dual output		±0.5		%
load regulation	single output (0% ~ 100% load)		±0.5		%
	dual output (1/4 ~ 100% load)		±1		%
switching frequency	at full load, nominal input	100			kHz

PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous				

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	standard models	500			Vdc
	suffix "HM" models	1,500			Vdc
	suffix "H" models (non-conductive black plastic only)	3,000			Vdc
isolation resistance		10 ⁹			Ω

ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-25		71	°C
storage temperature		-40		125	°C
max. case temperature	plastic case			95	°C
	copper case			100	°C
cooling	natural convection				

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	31.8 x 20.3 x 10.2 [1.25 x 0.8 x 0.4 inches]				mm
case material	standard models				non-conductive back plastic
	suffix "M" models				black coated copper with non-conductive base

MECHANICAL DRAWING


units: inch [mm]
 pin size: 0.02 inch (0.5mm) DIA
 tolerance: inches: x.xx = ±0.02, x.xxx = ±0.010
 millimeters: x.x = ±0.5, x.xx = ±0.25

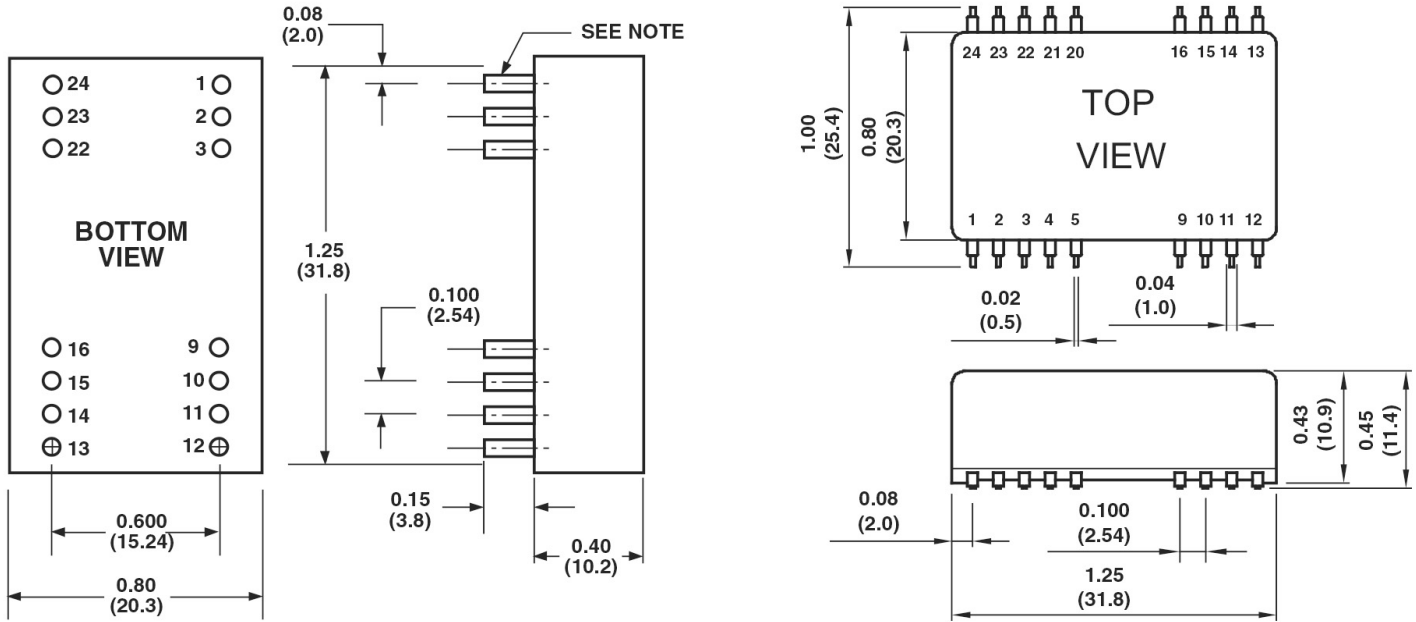


Pin Out									
PIN	500 Vdc				PIN	1,500 & 3,000 Vdc			
	Single outputs		Dual outputs			DIP	SMD	Dual outputs	
	DIP	SMD	DIP	SMD				DIP	SMD
1, 24	+Vin	+Vin	+Vin	+Vin	1, 24	NP	NC	NP	NC
2, 23	NC	NC	-Vout	-Vout	2, 3	-Vin	-Vin	-Vin	-Vin
3, 22	NC	NC	Common	Common	4,5	NP	NC	NP	NC
4	NP	NC	NP	NC	9	NC	NC	Common	Common
5	NP	NC	NP	NC	10,15	NC	NC	NC	NC
9	NP	NC	NP	NC	11	NC	NC	-Vout	-Vout
10, 15	-Vout	-Vout	Common	Common	12, 13	NP	NC	NP	NC
11, 14	+Vout	+Vout	+Vout	+Vout	14	+Vout	+Vout	+Vout	+Vout
12, 13	-Vin	-Vin	-Vin	-Vin	16	-Vout	-Vout	Common	Common
16	NP	NC	NP	NC	20, 21	NP	NC	NP	NC
20, 21	NP	NC	NP	NC	22, 23	+Vin	+Vin	+Vin	+Vin

Notes:
 1. NP = no pin
 2. NC = no connection with pin

DERATING CURVES

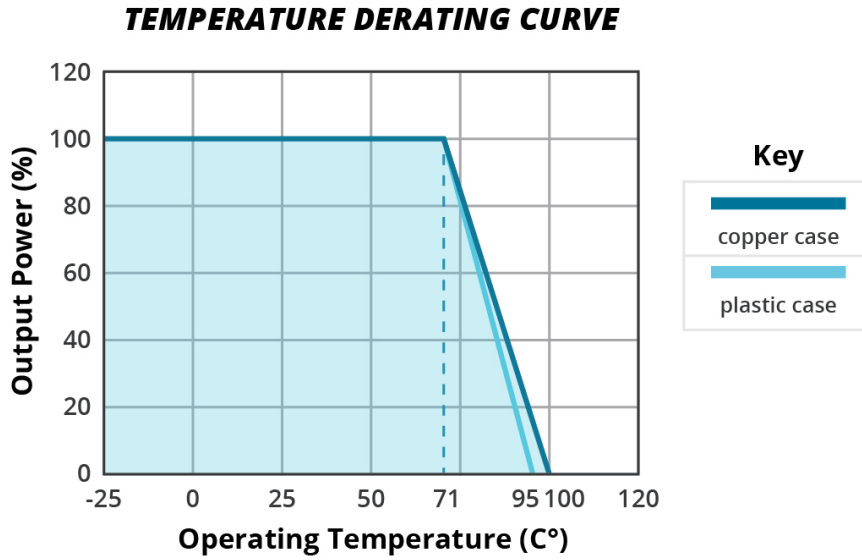

SOLDERABILITY

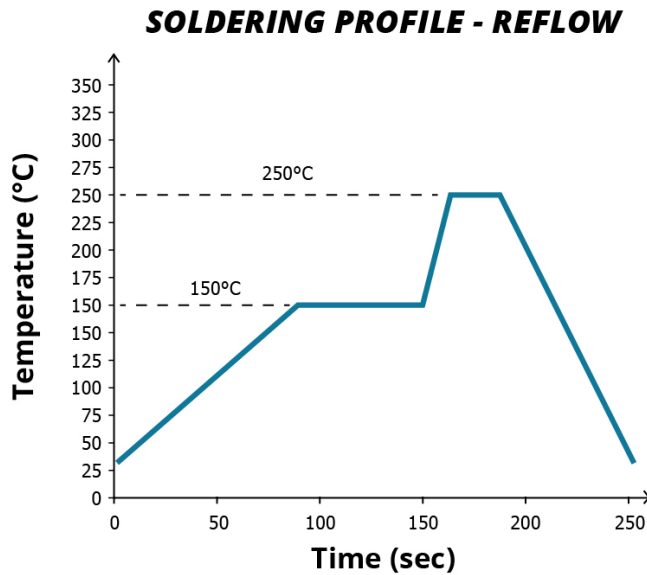

REVISION HISTORY

rev.	description	date
1.0	initial release	04/01/2009
1.01	new template applied, product image updated	08/22/2023
1.02	company address updated	11/05/2024

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
15575 SW Sequoia Pkwy #100 Fax 503.612.2383
Portland, OR 97224 **cu**i.com
800.275.4899 techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.