

SERIES: VOF-65G | DESCRIPTION: INTERNAL AC-DC POWER SUPPLY

FEATURES


- universal input 90 ~ 264 Vac, 47 ~ 63 Hz
- high efficiency up to 87 %
- 40 ~ 65 W with natural convection
- compact size, high power density (3 x 2 x 1.18 inch)
- low no load power consumption (<0.21 W)
- certified to IEC/EN/UL 62368-1
- operating temperature -20 ~ 70°C (with derating)
- class I and class II application
- over voltage, over temperature, over current and short-circuit protection
- FCC Part 15 Class B
- ITE protection (primary to secondary: reinforced; primary to earth: basic)
- power ON LED indicator



MODEL	output voltage typ (Vdc)	output current max (A)	output power max (W)	ripple and noise ¹ typ (mVp-p)	efficiency level typ (%)
VOF-65G-5	5	8.00	40	150	85
VOF-65G-12	12	5.416	65	240	87
VOF-65G-15	15	4.333	65	300	87
VOF-65G-19	19	3.421	65	300	87
VOF-65G-20	20	3.25	65	300	87
VOF-65G-24	24	2.708	65	300	87
VOF-65G-28	28	2.321	65	300	87
VOF-65G-30	30	2.167	65	300	87
VOF-65G-36	36	1.806	65	300	87
VOF-65G-48	48	1.354	65	300	87
VOF-65G-56	56	1.161	65	300	87

Notes: 1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 100μF electrolytic capacitor and a 0.1μF ceramic capacitor in parallel at output connector.

PART NUMBER KEY

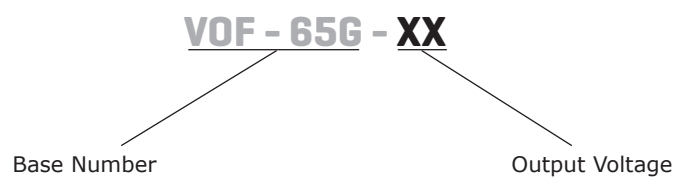

INPUT

parameter	conditions/description	min	typ	max	units
voltage		90	115~230	264	Vac
frequency		47	50~60	63	Hz
current	at 230 Vac			0.6	A
inrush current	at 230 Vac, cold start			130	A
touch current				0.1	mA
no load power consumption	at 230 Vac			0.1	W
	5 Vdc output model all other output models			0.21	W

OUTPUT

parameter	conditions/description	min	typ	max	units
load regulation	5 Vdc output model		±5		%
	all other output models		±3		%
hold-up time	at 115 Vac, 75 % load	10			ms
switching frequency	at full load		65		kHz

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection	auto recovery	105		170	%
over voltage protection	latch off type, ac recycle				
over temperature protection	latch off type, ac recycle				
short circuit protection	auto recovery				

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output, reinforced insulation, for 4 seconds			3,000 4,242	Vac Vdc
	input to ground, basic insulation, for 4 seconds			1,500 2,121	Vac Vdc
	output to ground, for 4 seconds			1,500 2,121	Vac Vdc
safety approvals	certified to 62368-1: IEC, EN, UL				
safety class	class I and class II application				
EMI/EMC	EN 55032:2015+A11:2020 EN 55035:2017+A11:2020 FCC 47 CFR Part 15 Subpart B ² ANSI C63.4: 2014 ISED ICES-003 (Issue 7)				
MTBF	as per Telcordia SR-332 (Bellcore) at 25°C	430,000			hours
RoHS	yes				

Notes: 2. This device meets FCC Part 15 standards and must operate under these conditions:
i. It cannot cause harmful interference
ii. It must accept any interference, including that which may cause undesired behavior

ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-20		70	°C
storage temperature		-20		85	°C
operating humidity	non-condensing	10		95	%
storage humidity	non-condensing	0		95	%
operating altitude				3,000	m

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	77.0 × 51.0 × 30.0 [3.000 × 2.000 × 1.180 inch]				mm
weight			120		g

MECHANICAL DRAWING

units: mm [inch]
tolerance: ±0.5mm

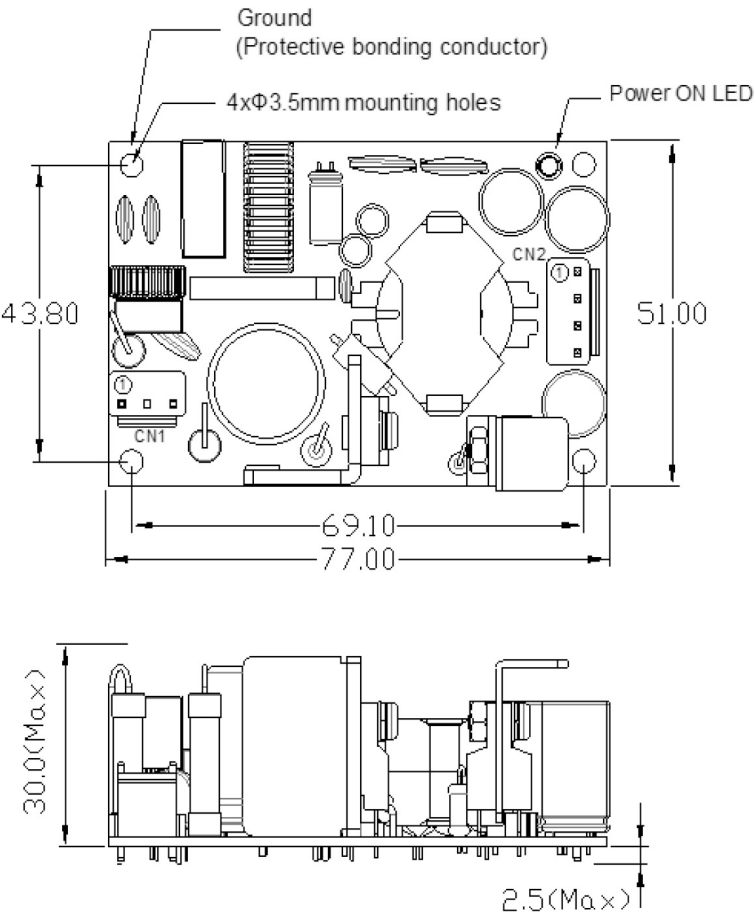


CN1: Input Connector JST B2P3-VH pitch: 7.92 mm or equivalent, mates with JST SVA-41T-P1.1 or equivalent	
PIN CONNECTIONS	
PIN	Function
1	AC(N)
2	AC(L)

CN2: Main Output Connector JST B4P-VH-B pitch: 3.96 mm or equivalent, mates with JST VHR-4N or equivalent	
PIN CONNECTIONS	
PIN	Function
1	-Vo
2	-Vo
3	+Vo
4	+Vo

- Note:
1. For Class I applications, all four mounting hole positions must be securely connected to the protective earth ground during the final system assembly to ensure optimal safety and EMI performance.
 2. For Class II applications, the four mounting hole positions must remain isolated from one another. Each mounting hole should be fixed to the chassis using insulated spacers.
 3. To enhance EMI performance under Class II test conditions, the VOF-65G Series allows an additional clamp core to be applied with one turn on the AC input.

DERATING CURVE

TEMPERATURE DERATING CURVE

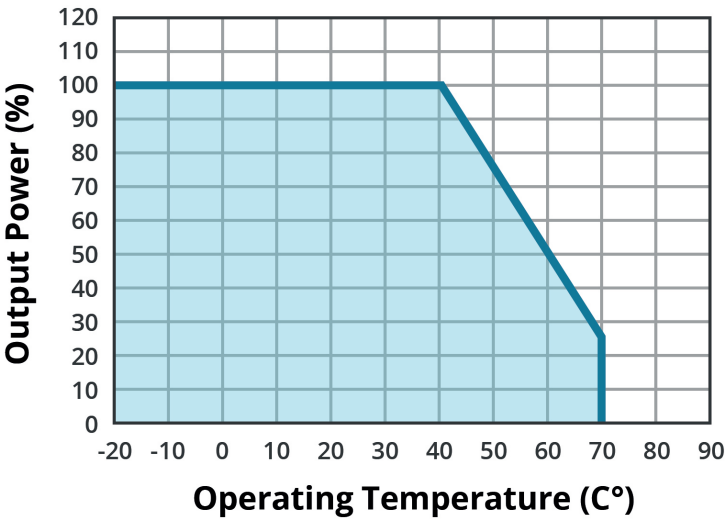

Note: 1. Derates linearly 2.5% per °C from 41°C ~ 70°C.

REVISION HISTORY

rev.	description	date
1.0	initial release	06/26/2025

The revision history provided is for informational purposes only and is believed to be accurate.



15575 SW Sequoia Pkwy #100
Portland, OR 97224
800.275.4899

Fax 503.612.2383
Belfuse.com
powersupport@belf.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.