

PART NUMBER 147-0701-281

ECO DATE 1 | INITIAL RELEASE | 09SEP2021

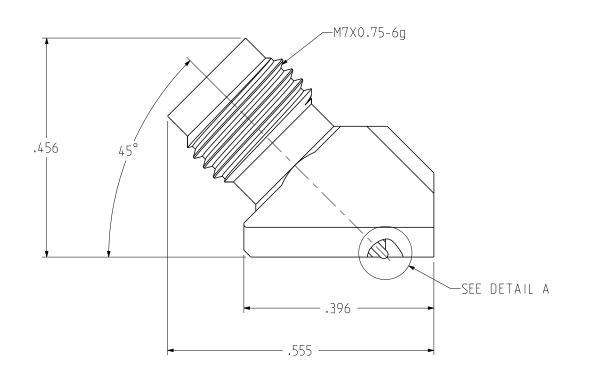

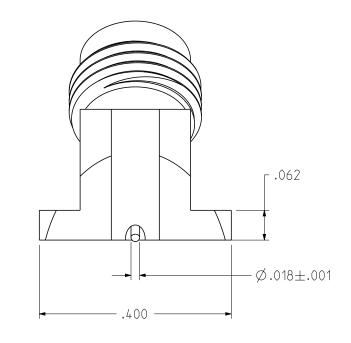



NOTES:


- 1. MATERIALS AND FINISH:
- 1.1 BODIES: GOLD PLATED BRASS
- 1.2 CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.3 INSULATOR: PTFE / ULTEM 1000

- 2. ELECTRICAL SPECIFICATIONS: 2.1 IMPEDANCE: 50 OHMS 2.2 FREQUENCY RANGE: DC-50 GHz
- 2.3 VSWR: DEPENDENT ON APPLICATION
- 2.4 WORKING VOLTAGE: 150 VRMS MAX AT SEA LEVEL 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN AT SEA LEVEL
- 2.6 INSULATION RESISTANCE: 5000 MEGOHM MIN
- 2.7 CONTACT RESISTANCE:
- 2.7.1 CENTER CONTACT INTIAL 4.0 MILLIOHM MAX, AFTER
- ENVIRONMENTAL NOT APPLICABLE 2.7.2 OUTER CONDUCTOR - INITIAL 2.5 MILLIOHM MAX, AFTER
- ENVIRONMENTAL NOT APPLICABLE
- 3. MECHANICAL SPECIFICATIONS:
- 3.1 ENGAGEMENT/DISENGAGEMENT FORCE: 2 INCH-POUNDS MAX 3.2 MATING TORQUE: 7 TO 10 INCH-POUNDS
- 3.3 DURABILITY: 500 CYCLES MIN
- 4. ENVIRONMENTAL:
- (MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012)
 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B
 4.2 OPERATING TEMPERATURE: -65 °C TO 165 °C
 4.3 CORROSION: MIL-STD-202, METHOD 101, CONDITION B

- 4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106



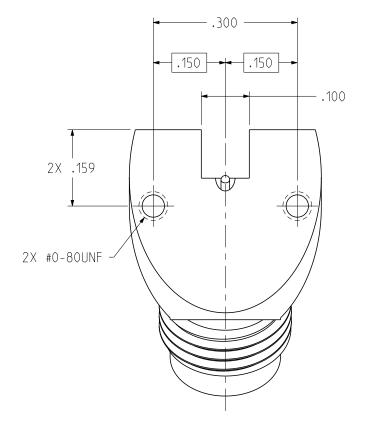



SCALE 4:1

CINCH	Cinch Model No: 147-0701-281/290		JOHNSON	
traced or copied without permission and is returnable upon demand.	(EU)/2015/863 COMPLIANT UNLESS OTHERWISE SPECIFIED UNITS: INCH	Cage Code 3RD ANGLE PROJECTION	Title: 2.4MM JACK, 45 DEGREE, PCB MOUNT	
		Drawn by: Roman Yao	Drawing No. 147-0701-281/290 REV. 1	
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.		Date: 09/09/2021	Size B DO NOT SCALE Workmanship Std:Sheel 1 OF 1	