

THE INFORMATION CONTAINED HEREIN IS CONSIDERED 'PROPRIETARY' TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

LED1 POLARITY			LED2 POLARITY			
PIN 11	PIN 12	COLOR	PIN 15	PIN 14	PIN 13	COLOR
-	+	YELLOW	-	+	/	ORANGE
/	/	/	/	+	-	GREEN

PRELIMINARY



ELECTRICAL CHARACTERISTICS @ 25°C

URNS RATIO

TP1	1CT : 1CT $\pm 2\%$
TP2	1CT : 1CT $\pm 2\%$
TP3	1CT : 1CT $\pm 2\%$
TP4	1CT : 1CT $\pm 2\%$

QCL @ 100kHz/100mVRMS

From CHANNEL 1 to CHANNEL 4
8mA DC BIAS (-40°C - +85°C) 350 μ H MIN.

INSERTION LOSS

0.1MHz TO 1MHz	-1.1 dB MAX
1MHz TO 65MHz	-0.8 dB MAX
65MHz TO 100MHz	-1.0 dB MAX
100MHz TO 125MHz	-1.5 dB MAX

RET. LOSS (MIN) @ 100OHMS

0.5MHz-40MHz	-18 dB
50MHz-100MHz	-12+20LOG(f/80MHz) dB

CM TO CM REJ

100kHz - 100MHz -28 dB MIN

CM TO DM REJ

100kHz - 100MHz -35 dB MIN

CROSS TALK

1MHz-60MHz	-30 dB MIN
60MHz-100MHz	-25 dB MIN

HIPOT (Isolation Voltage): 2250 VDC

100% OF PRODUCTION TESTED TO COMPLY
WITH IEEE 802.3 ISOLATION REQUIREMENTS

LED 1

VF (FORWARD VOLTAGE)	IF=20mA	YELLOW	2.1V TYP.
λ D (DOMINANT WAVELENGTH)	IF=20mA	YELLOW	590nm TYP.

LED 2


VF (FORWARD VOLTAGE)	IF=20mA	GREEN	2.2V TYP.
		ORANGE	2.0V TYP.
λ D (DOMINANT WAVELENGTH)	IF=20mA	GREEN	570nm TYP.
		ORANGE	605nm TYP.

USB ELECTRICAL:

INSULATION RESISTANCE:	1000 MEGA W(MIN)
CONTACT RESISTANCE:	25 MILLI W(MAX)
DIELECTRIC WITHSTANDING:	750 VAC

OPERATING TEMPERATURE: -40°C TO 85°C

SCHEMATIC

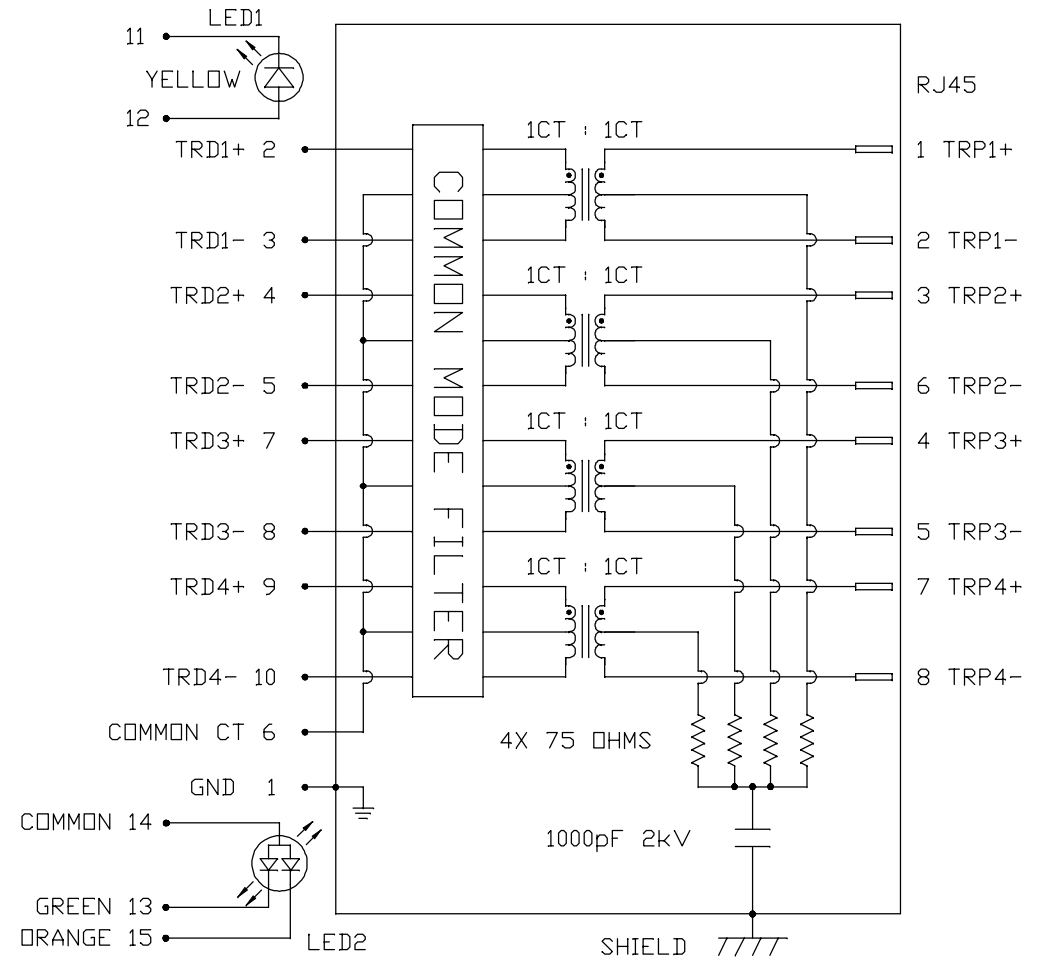

ORIGINATED BY
CHOW WANCHUNG
DATE 2018-09-25

DRAWN BY
XIE YIMING
DATE 2018-09-25

TITLE
gigabit MagJack® Combo
Extend Temperature
0862-1J1T-46A-F
PATENTED

PART NO. / DRAWING NO.
08621J1T46AF

FILE NAME
08621J1T46AF_PA.DWG

STANDARD DIM.
TOL. IN INCH

.X
.XX
.XXX

[] METRIC DIM.
AS REF.

UNIT : INCH [mm]
SCALE : N/A
SIZE : A4

REV. : PA

PAGE : 2





THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

MECHANICAL SPECIFICATION

RoHS

PRELIMINARY

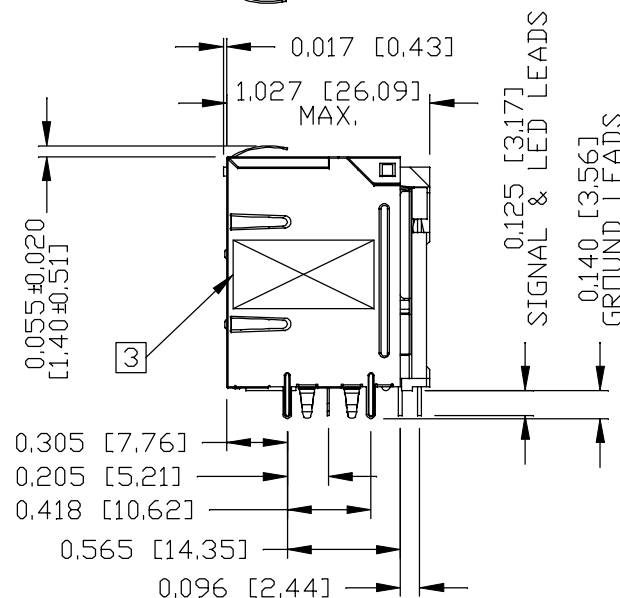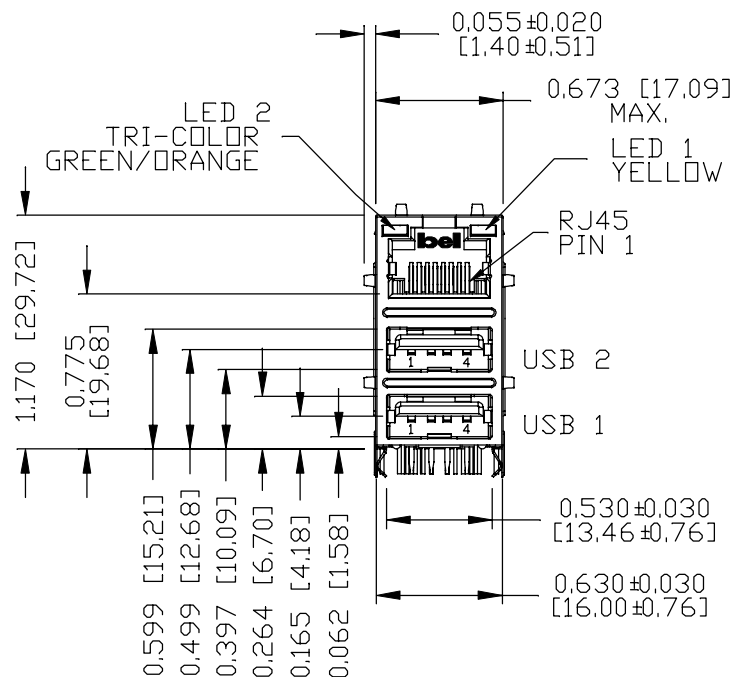

RJ45 MECHCNICAL:

PLASTIC HOUSING: THERMOPLASTIC PBT, BLACK
FLAMMABILITY RATING UL 94V-0

CONTACT PLATING: 30 MICRO-INCH HARD GOLD PLATING OR EQUIVALENT.

PINS: TIN-COATED COPPER WIRE, DIA 0.018 INCH.
100 MICRO-INCH MIN MATTE TIN. PINS ARE SOLDER DIPPED.

METAL SHIELD: NICKEL PLATED ON COPPER ALLOY.
(ALL GROUND LEADS ARE SOLDER DIPPED)

1. MARK PART WITH MFG LOGO, MFG NAME, PART NUMBER, AND DATE CODE.

2. THE PRODUCT IS RoHS COMPLIANT.

3. UL RECOGNIZED - FILE #E196366 AND E169987.

3. "PATENTED" MARKING. THE PRODUCT IS PATENT. THE PATENT NUMBER ARE
U.S. PAT. 6,840,817 AND U.S. PAT. 7,123,117.

5. THE PART IS RECOMMENDED FOR WAVE SOLDERING.
THE SUGGESTED PEAK WAVE SOLDERING CONDITION IS
260°C MAX AND 10 SECONDS MAX.



USB MECHANICAL:

MATING FORCE: 35 NEWTONS MAXIMUM

UNMATING FORCE: 10 NEWTONS MINIMUM

CONTACT: PROSPHER BRONZE,
30 MICRO-INCH GOLD PLATING
ON CONTACT AREA AND LEAD-FREE
TIN ON SOLDER TAIL.

ORIGINATED BY ANTON LIAD DATE 2018-09-25	TITLE gigabit MagJack® Combo Extend Temperature 0862-1J1T-46A-F PATENTED	PART NO. / DRAWING NO. 08621J1T46AF	STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REF.	REV. : PA PAGE : 3  bel MAGNETIC SOLUTIONS a bel group
DRAWN BY LI QUANKUN DATE 2018-09-25		FILE NAME 08621J1T46AF_PA.DWG	.X .XX .XXX	UNIT : INCH [mm] SCALE : N/A SIZE : A4	
			±0.010		

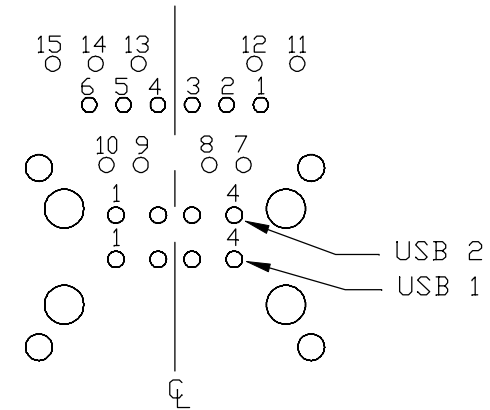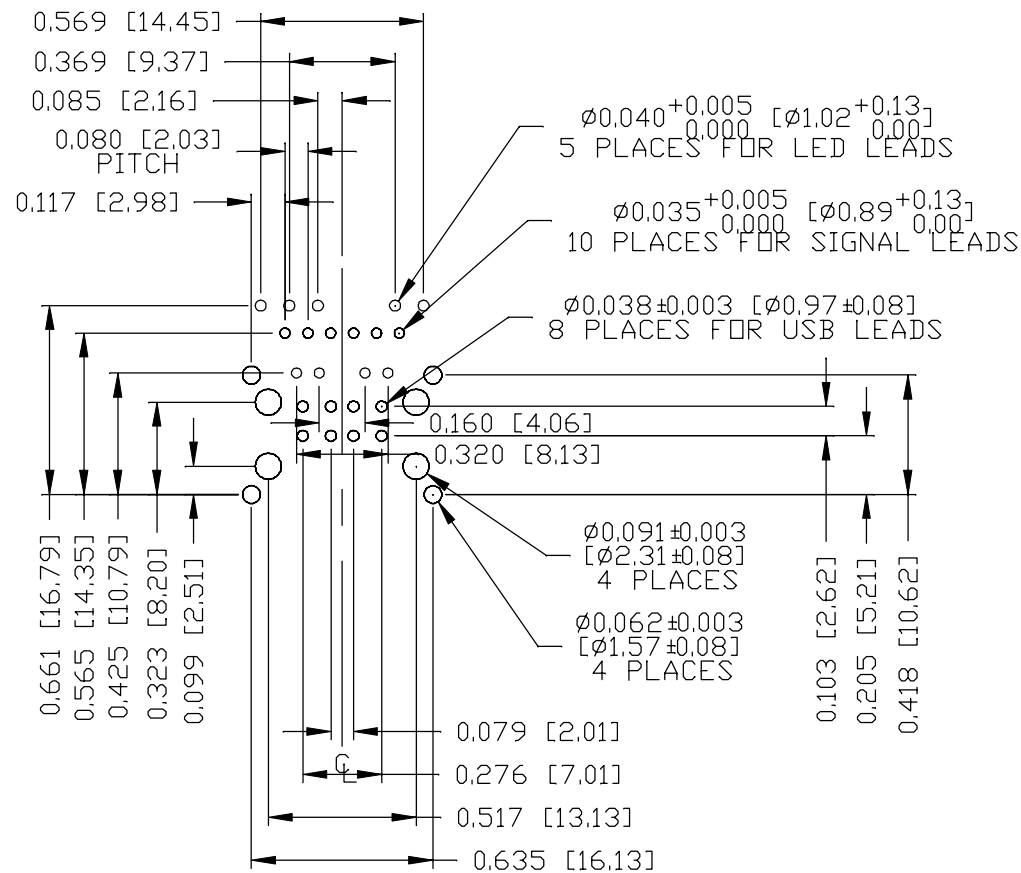

PIN ASSIGNMENT
SCALE 3:2

RECOMMENDED PCB FOOTPRINT
COMPONENT SIDE VIEW

ORIGINATED BY
ANTON LIAD
DATE 2018-09-25

DRAWN BY
LI QUANKUN
DATE 2018-09-25

TITLE
gigabit MagJack® Combo
Extend Temperature
0862-1J1T-46A-F
PATENTED

PART NO. / DRAWING NO.
08621J1T46AF

FILE NAME
08621J1T46AF_PA.DWG

STANDARD DIM.
TOL. IN INCH

.X
.XX
.XXX

[] METRIC DIM.
AS REF.

UNIT : INCH [mm]
SCALE : N/A
SIZE : A4

REV. : PA

PAGE : 4




THE INFORMATION CONTAINED HEREIN IS CONSIDERED
"PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE
COPIED, REPRODUCED OR DISCLOSED WITHOUT THE
WRITTEN APPROVAL OF BEL FUSE INC.

PRELIMINARY

RoHS



SUGGESTED PANEL OPENING

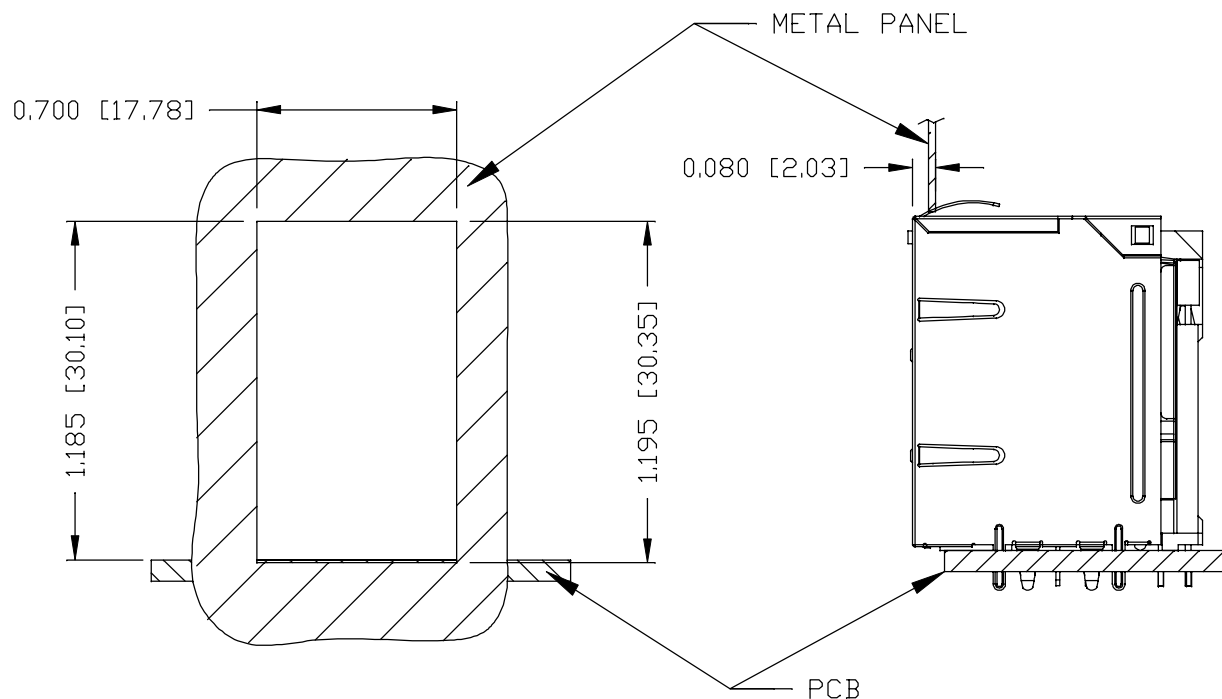

NOTE:

THE DISTANCE OF PANEL INSIDE SURFACE RELATIVE TO FRONT SURFACE OF PART IS ONLY A SUGGESTION.
IN CASE THIS DISTANCE IS DIFFERENT, THE REQUIRED PANEL OPENING DIMENSIONS CHANGE ACCORDINGLY.

PACKING INFORMATION

PACKING TRAY : 0200-9999-A3

PACKING QUANTITY : 42 PCS FINISHED GOODS PER TRAY

10 TRAYS (420PCS FINISHED GOODS) PER CARTON BOX

NOTE : CARDBOARDS ARE PLACED BETWEEN LAYERS OF PACKING TRAY INSIDE CARTON BOX
(INCLUDE THE UPPERMOST AND LOWERMOST TRAY)

ORIGINATED BY
ANTON LIAD
DATE 2018-09-25

DRAWN BY
LI QUANKUN
DATE 2018-09-25

TITLE
gigabit MagJack® Combo
Extend Temperature
0862-1J1T-46A-F
PATENTED

PART NO. / DRAWING NO.
08621J1T46AF

FILE NAME
08621J1T46AF_PA.DWG

STANDARD DIM.
TOL. IN INCH

.X	
.XX	
.XXX	±0.005

[] METRIC DIM.
AS REF.

UNIT : INCH [mm]
SCALE : N/A
SIZE : A4

REV. : PA	PAGE : 5
-----------	----------


bel MAGNETIC SOLUTIONS
a bel group