COVER-300-XBC

Cover Kit for ABC/MBC300 Series

Not For New Design
Please refer to exact equivalent product series
LFWLT300-CK




Features

- For use with ABC/MBC300 Series
- Non-corrosive
- Easy assembly
- Low weight
- Fully safe
- Access for AC and DC connectors

SPECIFICATIONS FOR COVER-300-XBC	
Derating Guidelines	ABC300 / MBC300: De-rate to 70% of values mentioned in temperature de-rating curves of open frame models at all load and ambient conditions.
Kit Contents	Mounting Base, Cover, Insulator, Fixing Screws
Mechanical Dimensions	133.7 x 85.3 x 42.45 mm
Cover and Base Material	EG(Zintec)/CRCA/GI 1.0 mm thick (Powder coating/ Passivation/ ED coating black)
Marked	A: PCB MTG; B: COVER MTG; C: SYSTEM MTG, M3 Thread

All dimensions are in mm. General tolerance: +/-1.0

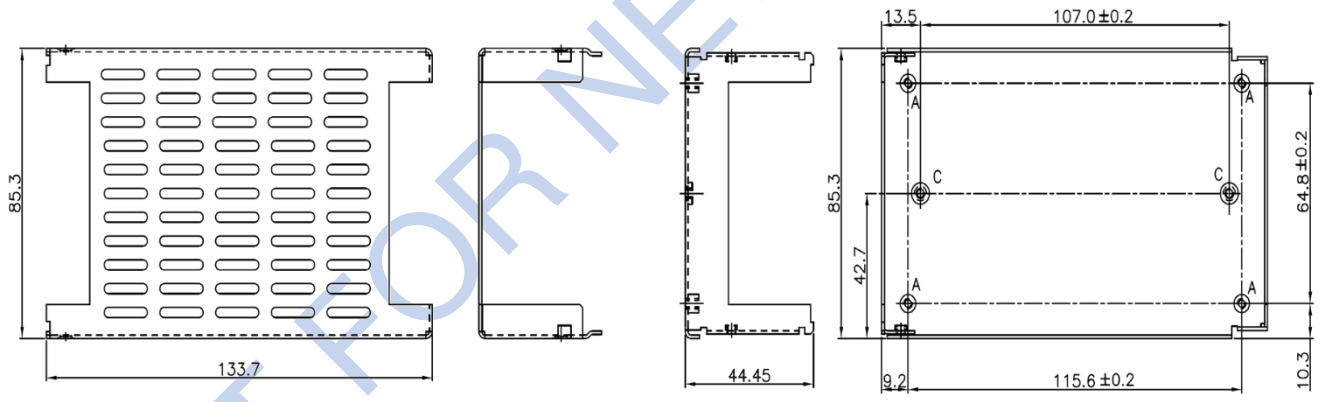

	PARTS	DETAIL	QTY	LOCATION
1	COVER KIT BASE	SCREW,PNHD,M3x6MM	4 NOS	AT "A"
2	COVER KIT TOP COVER	SCREW,CSK M3x6MM,130DEG	2 NOS	AT "B"
3*	INSULATOR MYLAR MYLAR M031	TO BE PLACED UNDER THE PSU IN CK	1 NO	BETWEEN PCB & CK BASE
4	SYSTEM MTG (NOT SUPPLIED WITH COVER KIT)	SCREW THREAD M3x0.5 3.0 MM MAX.PENETRATION	2 NOS	AT "C"

*ITEM NO 3 PART DETAILS.

MANUFACTURER	MPN	DESCRIPTION
DUPONT TEIJIN FILMS USLP	MYLAR M031	POLYETHYLENE TERPHTHALTE(PET)MYLAR MIN THK 0.25MM,VTM-2

NOT FOR NEW DESIGN

bel POWER SOLUTIONS & PROTECTION
a bel group

Asia-Pacific +86 755 298 85888
Europe, Middle East +353 61 49 8941
North America +1 866 513 2839

© 2022 Bel Power Solutions & Protection

Please read our datasheet & drawing disclaimer here.